



6TH ELEMENT D/I D140 930 R 50°/50°
RECESSED CEILING ROSE T12 Q200 26W 09-52V 500MA DALI W
 ARCHITECTURAL LIGHTING

90280L0160R0B50
971822W

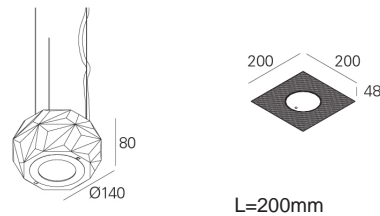

Light distribution



PRODUCT DESCRIPTION

Application Areas: Offices, Hotels and residential, Public spaces, Retail, Education, Health and care
Mounting Type: Suspended
Control Gear Included: Yes
Control Gear: LED driver 220-240VAC-50/60Hz

Input Power (W): 17
Power Factor (λ): 1
Luminaire Luminous Flux (lm): 2129
Luminaire Efficacy (lm/W): 125
Unified Glare Rating (UGR): <16
LED Lifetime - Rated Median Useful Life: 50.000h @ L80, B10, Ta 25°C
CCT - Correlated Colour Temperature (K): 3000
Colour Rendering Index (CRI): >90
Chromaticity Tolerance (MacAdam step): <3
This Product Contains a Light Source of Energy Efficiency Class: E
LED Module Forward Voltage Range (VF): 34,4
Input luminaire current (mA): 500

6TH ELEMENT D/I D140 930 R 50°/50°

CHARACTERISTICS

Luminaire Type: Round downlight
Luminaire Module: Individual
Insulation Class: III
Ingress Protection (IP): 40
Ambient Temperature Range (°C):]-5, 25[
Warranty (Years): 5
Current Supply Cable Entry Point: Back

DIMENSIONS

H - Height (mm): 80
D - Diameter (mm): 140

MATERIALS

Body Material: Die-cast aluminium
Finishing: Epoxy polyester powder coated
Colour: Rusty chain (R)
Glow-wire Resistance (°C): 650

RECESSED CEILING ROSE T12 Q200 26W 09-52V 500MA DALI W

CHARACTERISTICS

Insulation Class: II
Ingress Protection (IP): 20
Ambient Temperature Range (°C):]-5, 25[
Warranty (Years): 5

OPTICAL SYSTEM

Optical System: Lens
Light Distribution: Direct / Indirect
Beam Angle (°): 51/51

MATERIALS

Colour: White (W)

TECHNICAL DATA

Light Source: LED

TECHNICAL DATA

Input Power (W): 26
Input Driver Voltage: 220-240V-50/60Hz

**6TH ELEMENT D/I D140 930 R 50°/50°
RECESSED CEILING ROSE T12 Q200 26W 09-52V 500MA DALI W**
ARCHITECTURAL LIGHTING

**90280L0160R0B50
971822W**

Power Supply Dimming: DALI 2
Maximum of Luminaires by Magnetic Circuit Breaker B16: <38
Inrush Current (A): 30
Pulse Duration (µs): 100

DIMENSIONS

L - Length (mm): 200
W - Width (mm): 200
H - Height (mm): 48
D - Recess Dimensions (mm): 135x135
H - Recess Height (mm): 48

NOTES

- To complete the product it is necessary to order the suspension and the current supply cable. Please order separately.