

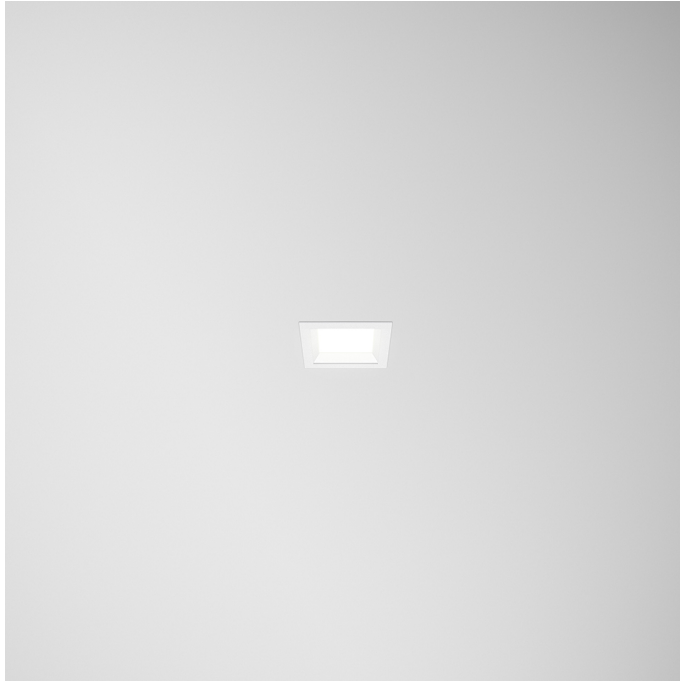


**HOLI SQ MINI Q100 LIGHT+ 830 W/W
DRIVER 8,4W 10-42V 200MA HF**
ARCHITECTURAL LIGHTING

**90293L1070W03W0
900001E**



Light distribution



L=100mm

PRODUCT DESCRIPTION

Application Areas: Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

Mounting Type: Recessed

Control Gear Included: Yes

Control Gear: LED driver 220-240VAC-50/60Hz

HOLI SQ MINI Q100 LIGHT+ 830 W/W

CHARACTERISTICS

Luminaire Type: Square downlight

Luminaire Module: Individual

Insulation Class: III

Ingress Protection (IP): 40

Ambient Temperature Range (°C):]-5, 25[

Warranty (Years): 5

MATERIALS

Body Material: Steel sheet

Frame Material: Steel sheet

Finishing: Epoxy polyester powder coated

Colour: White (W)

Glow-wire Resistance (°C): 650

OPTICAL SYSTEM

Optical System: LIGHT+ - Opal diffuser

Light Distribution: Direct

Beam Angle (°): 96

TECHNICAL DATA

Light Source: LED

Input Power (W): 7

Power Factor (λ): 1

Luminaire Luminous Flux (lm): 807

Luminaire Efficacy (lm/W): 115

United Glare Rating (UGR): <25

LED Lifetime - Rated Median Useful Life: 72.000h @ L70, B10, Ta 25°C

CCT - Correlated Colour Temperature (K): 3000

Colour Rendering Index (CRI): >80

Chromaticity Tolerance (MacAdam step): <3

This Product Contains a Light Source of Energy Efficiency Class: E

LED Module Forward Voltage Range (VF): 33

Input luminaire current (mA): 200

DIMENSIONS

L - Length (mm): 100

W - Width (mm): 100

H - Height (mm): 69

D - Recess Dimensions (mm): 97x97

H - Recess Height (mm): 79

Net Weight (kg): 0.7

DRIVER 8,4W 10-42V 200MA HF

CHARACTERISTICS

Insulation Class: II

Ingress Protection (IP): 20

Ambient Temperature Range (°C):]-20, 45[

Warranty (Years): 5

TECHNICAL DATA

Input Power (W): 8,4

Input Driver Voltage: 220-240V-50/60Hz

**HOLI SQ MINI Q100 LIGHT+ 830 W/W
DRIVER 8,4W 10-42V 200MA HF**

**90293L1070W03W0
900001E**

ARCHITECTURAL LIGHTING

Power Supply Dimming: ON/OFF

Maximum of Luminaires by Magnetic Circuit Breaker B16: <30

Inrush Current (A): 15

Pulse Duration (µs): 100

DIMENSIONS

Net Weight (kg): 0.076