




# HOLI SQ /T Q106 PRISM+ 840 W LO

ARCHITECTURAL LIGHTING

90223L1060W0000

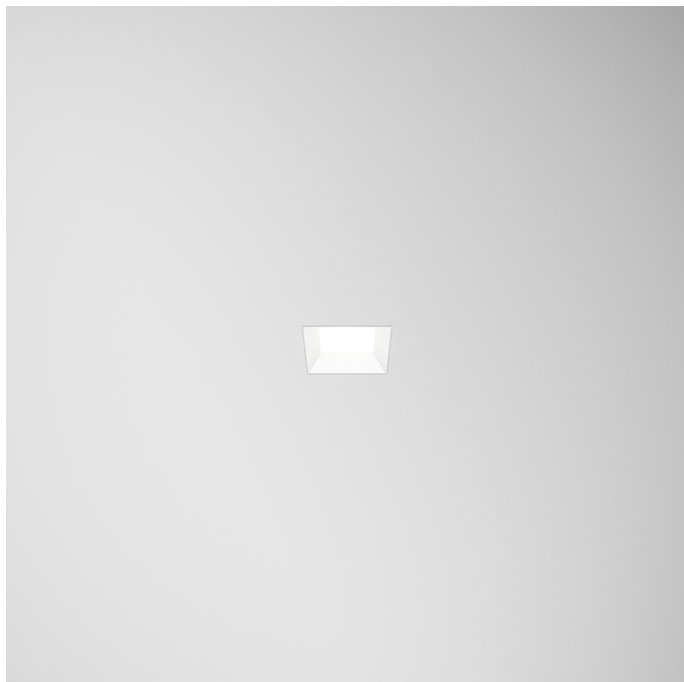

## Light distribution



L=106mm

## PRODUCT DESCRIPTION

**Application Areas:** Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

**Mounting Type:** Trimless

**Control Gear Included:** No

## HOLI SQ /T Q106 PRISM+ 840 W LO

### CHARACTERISTICS

**Luminaire Type:** Square downlight

**Luminaire Module:** Individual

**Insulation Class:** III

**Ingress Protection (IP):** 40

**Ambient Temperature Range (°C):** ]-5, 25[

**Fixing System:** Trimless recessed frame

**Warranty (Years):** 5

### MATERIALS

**Body Material:** Steel sheet

**Frame Material:** Steel sheet

**Finishing:** Epoxy polyester powder coated

**Colour:** White (W)

**Glow-wire Resistance (°C):** 650

### OPTICAL SYSTEM

**Optical System:** PRISM+ - Microprismatic diffuser

**Light Distribution:** Direct

**Beam Angle (°):** 76

### TECHNICAL DATA

**Light Source:** LED

**Input Power (W):** 7

**Power Factor (λ):** 1

**Luminaire Luminous Flux (lm):** 748

**Luminaire Efficacy (lm/W):** 107

**Unified Glare Rating (UGR):** <19

**LED Lifetime - Rated Median Useful Life:** 72.000h @ L70, B10, Ta 25°C

**CCT - Correlated Colour Temperature (K):** 4000

**Colour Rendering Index (CRI):** >80

**Chromaticity Tolerance (MacAdam step):** <3

**This Product Contains a Light Source of Energy Efficiency Class:** D

**LED Module Forward Voltage Range (VF):** 33

**Input luminaire current (mA):** 200

### DIMENSIONS

**L - Length (mm):** 106

**W - Width (mm):** 106

**H - Height (mm):** 74

**D - Recess Dimensions (mm):** 114x114

**H - Recess Height (mm):** 84

**Net Weight (kg):** 0.7

### NOTES

- To complete the product it is necessary to order the driver and the recessed frame. Please order separately.