




## HOLI SQ /T MINI Q95 LIGHT+ 840 B

ARCHITECTURAL LIGHTING

90267L1070B0000

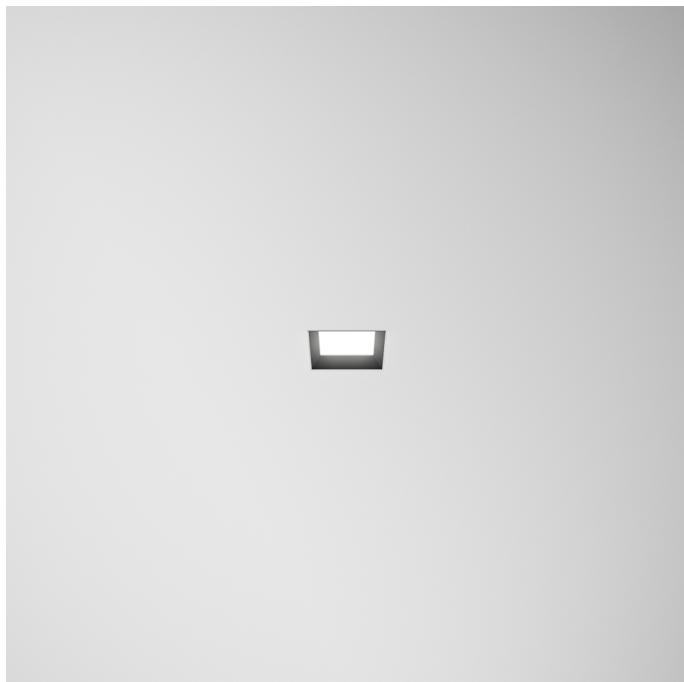

### Light distribution



L=95mm

### PRODUCT DESCRIPTION

**Application Areas:** Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

**Mounting Type:** Trimless

**Control Gear Included:** No

## HOLI SQ /T MINI Q95 LIGHT+ 840 B

### CHARACTERISTICS

**Luminaire Type:** Square downlight

**Luminaire Module:** Individual

**Insulation Class:** III

**Ingress Protection (IP):** 40

**Ambient Temperature Range (°C):** ]-5, 25[

**Fixing System:** Trimless recessed frame

**Warranty (Years):** 5

### MATERIALS

**Body Material:** Steel sheet

**Frame Material:** Steel sheet

**Finishing:** Epoxy polyester powder coated

**Colour:** Black (B)

**Glow-wire Resistance (°C):** 650

### OPTICAL SYSTEM

**Optical System:** LIGHT+ - Opal diffuser

**Light Distribution:** Direct

**Beam Angle (°):** 96

### TECHNICAL DATA

**Light Source:** LED

**Input Power (W):** 7

**Power Factor (λ):** 1

**Luminaire Luminous Flux (lm):** 837

**Luminaire Efficacy (lm/W):** 120

**Unified Glare Rating (UGR):** <25

**LED Lifetime - Rated Median Useful Life:** 72.000h @ L70, B10, Ta 25°C

**CCT - Correlated Colour Temperature (K):** 4000

**Colour Rendering Index (CRI):** >80

**Chromaticity Tolerance (MacAdam step):** <3

**This Product Contains a Light Source of Energy Efficiency Class:** D

**LED Module Forward Voltage Range (VF):** 33

**Input luminaire current (mA):** 200

### DIMENSIONS

**L - Length (mm):** 95

**W - Width (mm):** 95

**H - Height (mm):** 71

**D - Recess Dimensions (mm):** 101x101

**H - Recess Height (mm):** 81

**Net Weight (kg):** 0.6

### NOTES

- To complete the product it is necessary to order the driver and the recessed frame. Please order separately.