




HOLI SQ /T MINI Q95 LIGHT+ 840 B

ARCHITECTURAL LIGHTING

90267L1070B0000

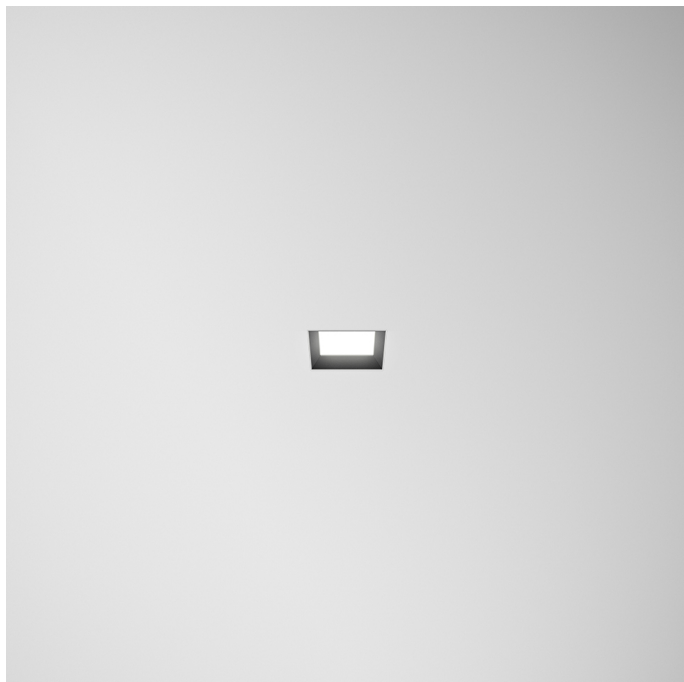

Light distribution



L=95mm

PRODUCT DESCRIPTION

Application Areas: Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

Mounting Type: Trimless

Control Gear Included: No

HOLI SQ /T MINI Q95 LIGHT+ 840 B

CHARACTERISTICS

Luminaire Type: Square downlight

Luminaire Module: Individual

Insulation Class: III

Ingress Protection (IP): 40

Ambient Temperature Range (°C):]-5, 25[

Fixing System: Trimless recessed frame

Warranty (Years): 5

MATERIALS

Body Material: Steel sheet

Frame Material: Steel sheet

Finishing: Epoxy polyester powder coated

Colour: Black (B)

Glow-wire Resistance (°C): 650

OPTICAL SYSTEM

Optical System: LIGHT+ - Opal diffuser

Light Distribution: Direct

Beam Angle (°): 96

TECHNICAL DATA

Light Source: LED

Input Power (W): 7

Power Factor (λ): 1

Luminaire Luminous Flux (lm): 837

Luminaire Efficacy (lm/W): 120

Unified Glare Rating (UGR): <25

LED Lifetime - Rated Median Useful Life: 72.000h @ L70, B10, Ta 25°C

CCT - Correlated Colour Temperature (K): 4000

Colour Rendering Index (CRI): >80

Chromaticity Tolerance (MacAdam step): <3

This Product Contains a Light Source of Energy Efficiency Class: D

LED Module Forward Voltage Range (VF): 33

Input luminaire current (mA): 200

DIMENSIONS

L - Length (mm): 95

W - Width (mm): 95

H - Height (mm): 71

D - Recess Dimensions (mm): 101x101

H - Recess Height (mm): 81

Net Weight (kg): 0.6

NOTES

- To complete the product it is necessary to order the driver and the recessed frame. Please order separately.