
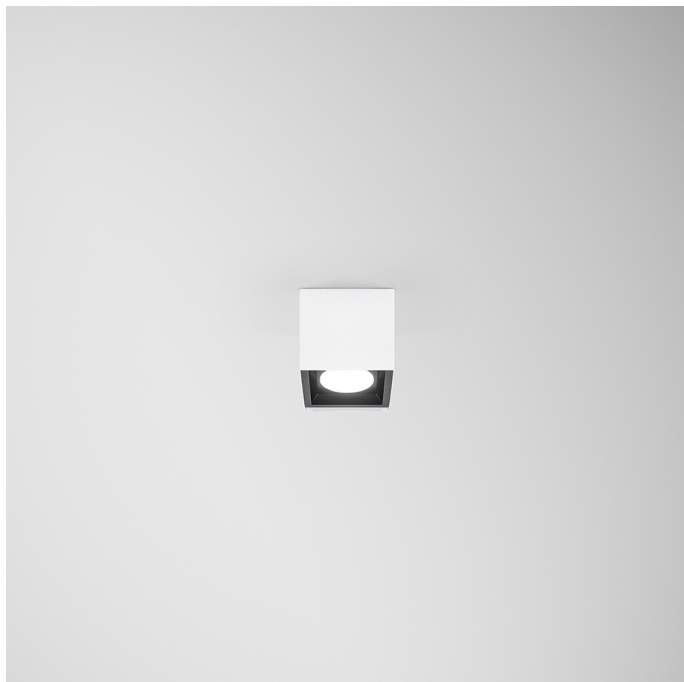

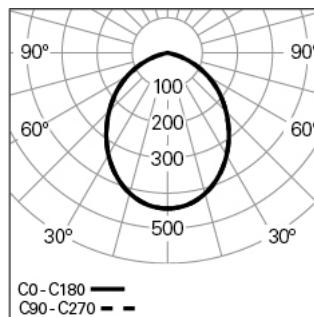


HOLI SQ /C MINI Q115 LIGHT+ HF 840 W/B

ARCHITECTURAL LIGHTING

90269L006EW00B0**Light distribution**

L=115mm

PRODUCT DESCRIPTION

Application Areas: Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

Mounting Type: Surface mounted

Control Gear Included: Yes

Control Gear: LED driver 220-240VAC-50/60Hz

HOLI SQ /C MINI Q115 LIGHT+ HF 840 W/B**CHARACTERISTICS**

Luminaire Type: Square downlight

Luminaire Module: Individual

Insulation Class: I

Ingress Protection (IP): 40

Ambient Temperature Range (°C):]-5, 25[

Warranty (Years): 5

Current Supply Cable Entry Point: Back

Light Source: LED

Input Power (W): 8

Input Driver Voltage: 220-240V-50/60Hz

Power Factor (λ): 0,78

Luminaire Luminous Flux (lm): 930

Luminaire Efficacy (lm/W): 116

Unified Glare Rating (UGR): <22

LED Lifetime - Rated Median Useful Life: 72.000h @ L70, B10, Ta 25°C

CCT - Correlated Colour Temperature (K): 4000

Colour Rendering Index (CRI): >80

Chromaticity Tolerance (MacAdam step): <3

This Product Contains a Light Source of Energy Efficiency Class: D

LED Module Forward Voltage Range (VF): 33

Power Supply Dimming: ON/OFF

Central Battery Emergency Lighting System (VDC): 176-280

Maximum of Luminaires by Magnetic Circuit Breaker B16: <30

Inrush Current (A): 15

Pulse Duration (μs): 100

MATERIALS

Body Material: Steel sheet

Frame Material: Steel sheet

Finishing: Epoxy polyester powder coated

Colour: White (W)/Black (B)

Glow-wire Resistance (°C): 650

DIMENSIONS

L - Length (mm): 115

W - Width (mm): 115

H - Height (mm): 120

Net Weight (kg): 1

OPTICAL SYSTEM

Optical System: LIGHT+ - Opal diffuser

Light Distribution: Direct

Beam Angle (°): 94

TECHNICAL DATA