




TALEA LINE L1430 BLINE DALI 830 SRT

TUBULAR LUMINAIRES

90439L250H00349

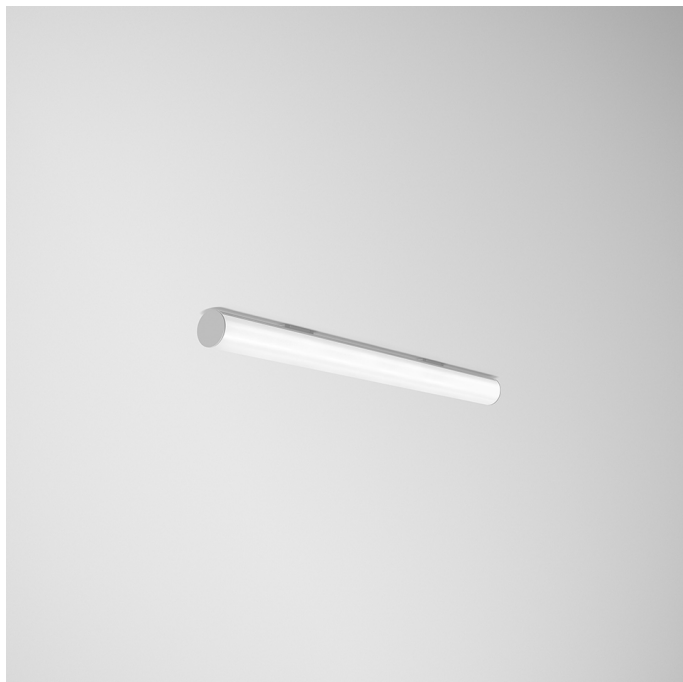

Light distribution



L=1430mm

PRODUCT DESCRIPTION

Application Areas: Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

Mounting Type: Surface mounted, Suspended, Wall mounted

Control Gear Included: Yes

Control Gear: LED driver 220-240VAC-50/60Hz

Input Driver Voltage: 220-240V-50/60Hz

Power Factor (λ): 0,97

Luminaire Luminous Flux (lm): 5400

Luminaire Efficacy (lm/W): 120

Unified Glare Rating (UGR): <25

LED Lifetime - Rated Median Useful Life: 80.000h @ L90, B10, Ta 25°C

CCT - Correlated Colour Temperature (K): 3000

Colour Rendering Index (CRI): >80

Chromaticity Tolerance (MacAdam step): <3

LED Module Forward Voltage Range (VF): 33,1

Power Supply Dimming: DALI 2

Central Battery Emergency Lighting System (VDC): 176-280

Maximum of Luminaires by Magnetic Circuit Breaker B16: <34

Inrush Current (A): 18

Pulse Duration (μ s): 180

TALEA LINE L1430 BLINE DALI 830 SRT

CHARACTERISTICS

Luminaire Type: Straight line luminaire

Luminaire Module: Start (SRT)

Insulation Class: I

Ingress Protection (IP): 40

Ambient Temperature Range (°C):]-5, 25[

Warranty (Years): 5

Current Supply Cable Entry Point: Back

DIMENSIONS

L - Length (mm): 1430

D - Diameter (mm): 100

Net Weight (kg): 4.2

MATERIALS

Body Material: Extruded aluminium profile

Finishing: Epoxy polyester powder coated

Glow-wire Resistance (°C): 960

OPTICAL SYSTEM

Optical System: bLINE - Opal diffuser

Light Distribution: Direct

Beam Angle (°): 205

TECHNICAL DATA

Light Source: LED

Input Power (W): 45

NOTES

- For surface mounted version it is necessary to order the fixation system separately;
- For suspended version it is necessary to order the suspension, the current supply cable and the ceiling rose. Please order separately;
- To complete the line it is necessary to order the body connector kit and the start kit. Please order separately;
- Dimensions do not include start kit. To complete the line add 8 mm to the length;
- For lengths over L1700 mm, a curvature of up to 1% is acceptable within the specified tolerance and can be corrected by adjusting the positioning of the suspension points.