
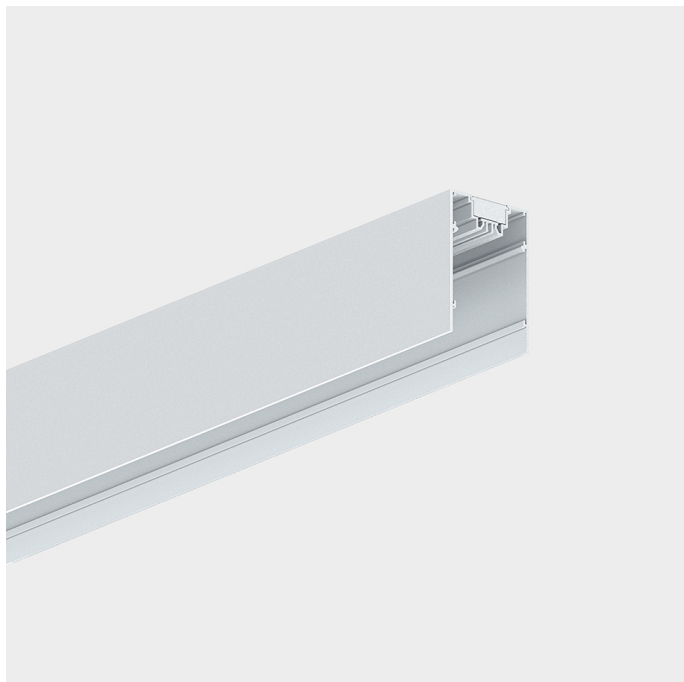


**REBA 65 D/I EXT LINE L2249 W SRT/END**

ALUMINIUM PROFILE SYSTEMS

**90512L0080W0083**

L=2249mm

**PRODUCT DESCRIPTION**

**Application Areas:** Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

**Mounting Type:** Suspended

**Control Gear Included:** No

- To complete the product it is necessary to order the inner profile, suspension kit, current supply cable and ceiling rose. Please order separately;
- Dimensions do not include start kit. To complete the line add 6 mm to the length;
- The maximum line length with 1 single feed/power point is 15000 mm.

**REBA 65 D/I EXT LINE L2249 W SRT/END****CHARACTERISTICS**

**Luminaire Type:** Straight line luminaire

**Luminaire Module:** Start / End (SRT/END)

**Current Supply Cable Entry Point:** Back

**MATERIALS**

**Body Material:** Extruded aluminium profile

**Finishing:** Epoxy polyester powder coated

**Colour:** White (W)

**DIMENSIONS**

**L - Length (mm):** 2249

**W - Width (mm):** 65

**H - Height (mm):** 97

**Net Weight (kg):** 3.64

**NOTES**

- The indirect light diffuser is included on the product;
- To complete the product it is necessary to order the inner profile separately;
- To complete the product it is necessary to order the start kit, through-wiring and body connector kit. Please order separately;