




## REBA 50 /W INT IND L2522 BLINE HF 840 HO

ALUMINIUM PROFILE SYSTEMS

90518L009EW0000

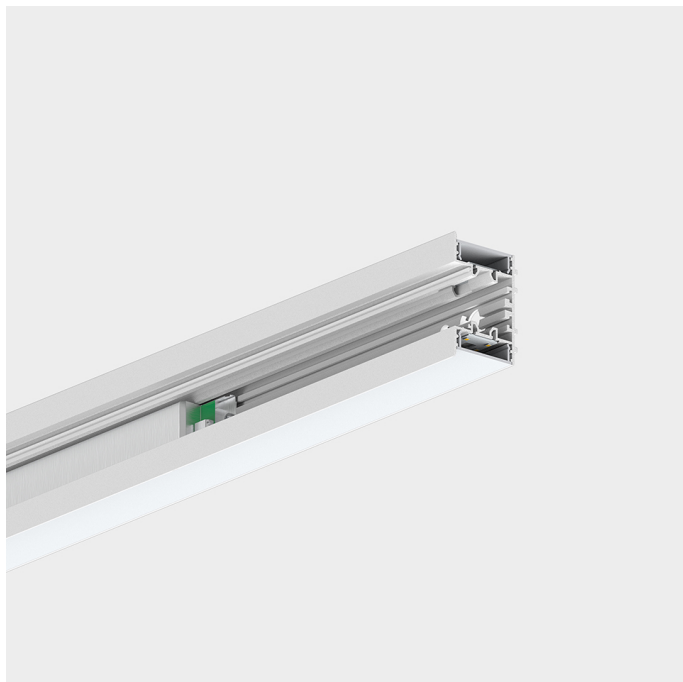

### Light distribution

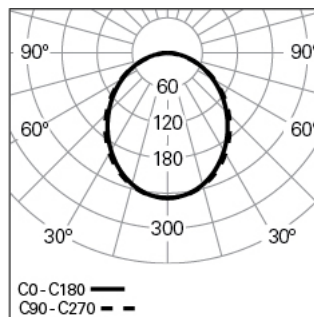

L=2522mm

### PRODUCT DESCRIPTION

**Application Areas:** Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

**Mounting Type:** Wall mounted

**Control Gear Included:** No

## REBA 50 /W INT IND L2522 BLINE HF 840 HO

### CHARACTERISTICS

**Luminaire Type:** Straight line luminaire

**Luminaire Module:** Individual, Middle (MID), Start / End (SRT/END)

**Insulation Class:** I

**Ingress Protection (IP):** 40

**Ambient Temperature Range (°C):** ]-5, 25[

**Warranty (Years):** 5

**Current Supply Cable Entry Point:** Back

### MATERIALS

**Body Material:** Extruded aluminium profile

**Finishing:** Epoxy polyester powder coated

**Colour:** White (W)

**Glow-wire Resistance (°C):** 960

### OPTICAL SYSTEM

**Optical System:** bLINE - Opal diffuser

**Light Distribution:** Indirect

**Beam Angle (°):** 104

### TECHNICAL DATA

**Input Power (W):** 65

**Power Factor (λ):** 0,94

**Luminaire Luminous Flux (lm):** 7558

**Luminaire Efficacy (lm/W):** 116

**Photobiological safety according to IEC 62471:** Risk group 0 - Exempt (RG0)

**LED Lifetime - Rated Median Useful Life [Indirect]:** 80.000h @ L90, B10, Ta 25°C

**CCT - Correlated Colour Temperature (K) [Indirect]:** 4000

**Colour Rendering Index (CRI) [Indirect]:** >80

**Chromaticity Tolerance (MacAdam step) [Indirect]:** <3

**This Product contains a Light Source of Energy Efficiency Class [Indirect]:** C

**Power Supply Dimming [Indirect]:** ON/OFF

### DIMENSIONS

**L - Length (mm):** 2522

**W - Width (mm):** 54

**H - Height (mm):** 85

**Net Weight (kg):** 5.14

### NOTES

- To complete the product it is necessary to order the inner profile separately.