




REBA 50 /W INT IND VRT L631W631 BLINE DALI 840 HO

90518V004HW0000

ALUMINIUM PROFILE SYSTEMS

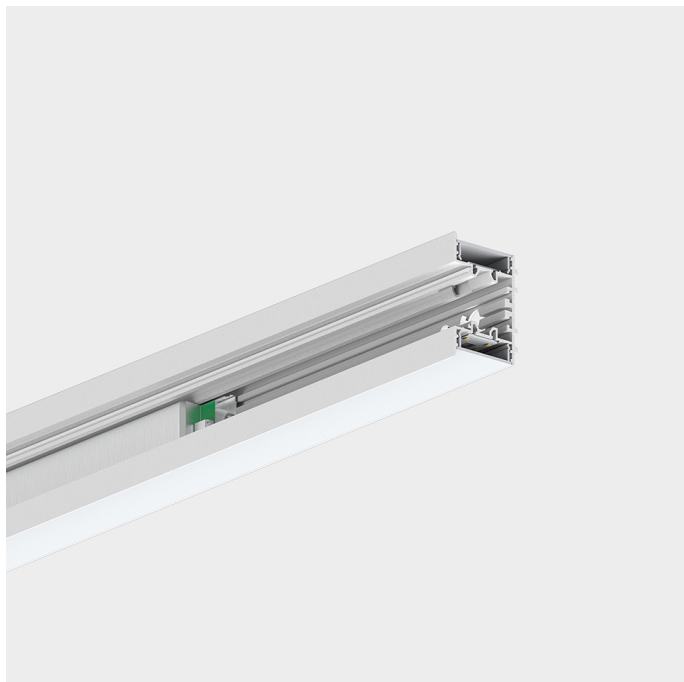

Light distribution

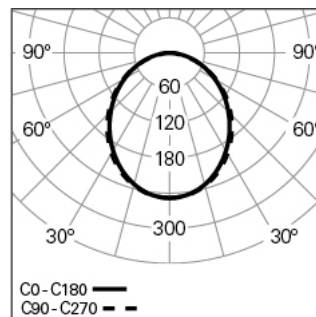

PRODUCT DESCRIPTION

Application Areas: Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

Mounting Type: Wall mounted

Control Gear Included: No

REBA 50 /W INT IND VRT L631W631 BLINE DALI 840 HO

CHARACTERISTICS

Luminaire Type: Straight line luminaire

Luminaire Module: Vertical corner (VRT)

Insulation Class: I

Ingress Protection (IP): 40

Ambient Temperature Range (°C):]-5, 25[

Warranty (Years): 5

Current Supply Cable Entry Point: Back

Luminaire Efficacy (lm/W): 108

Photobiological safety according to IEC 62471: Risk group 0 - Exempt (RG0)

LED Lifetime - Rated Median Useful Life [Indirect]: 80.000h @ L90, B10, Ta 25°C

CCT - Correlated Colour Temperature (K) [Indirect]: 4000

Colour Rendering Index (CRI) [Indirect]: >80

Chromaticity Tolerance (MacAdam step) [Indirect]: <3

This Product contains a Light Source of Energy Efficiency Class [Indirect]: C

Power Supply Dimming [Indirect]: DALI 2

DIMENSIONS

L - Length (mm): 631

W - Width (mm): 54

H - Height (mm): 85

Net Weight (kg): 2.5

MATERIALS

Body Material: Extruded aluminium profile

Finishing: Epoxy polyester powder coated

Colour: White (W)

Glow-wire Resistance (°C): 960

OPTICAL SYSTEM

Optical System: bLINE - Opal diffuser

Light Distribution: Indirect

TECHNICAL DATA

Input Power (W): 31

Power Factor (λ): 0,95

Luminaire Luminous Flux (lm): 3362

NOTES

- To complete the product it is necessary to order the inner profile separately.