



# ROFY 85 IP /E D0400 LIGHT+ DALI 830 I LO

ARCHITECTURAL LIGHTING

90574L400HI0300

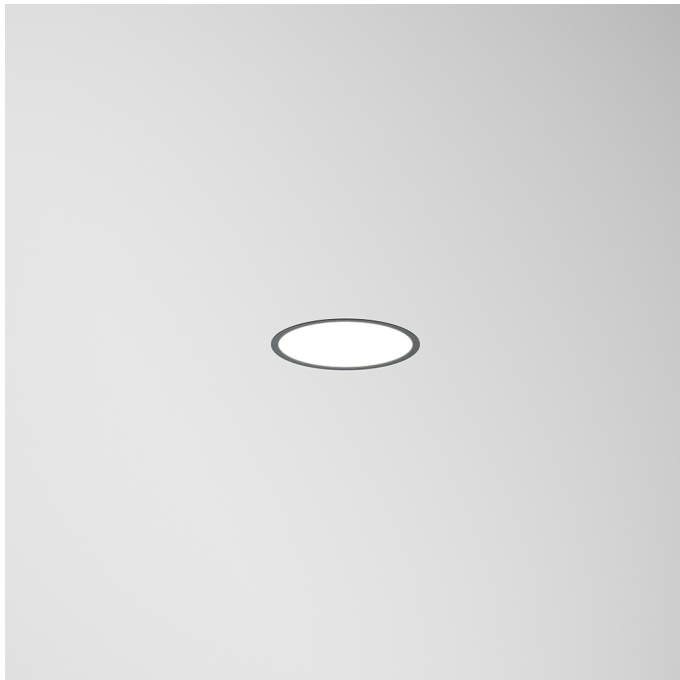

## Light distribution

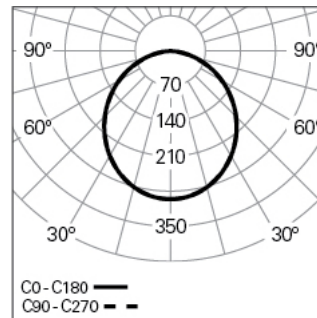

## PRODUCT DESCRIPTION

**Application Areas:** Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

**Mounting Type:** Recessed

**Control Gear Included:** Yes

**Control Gear:** LED driver 220-240VAC-50/60Hz

## ROFY 85 IP /E D0400 LIGHT+ DALI 830 I LO

### CHARACTERISTICS

**Luminaire Type:** Circular luminaire

**Luminaire Module:** Individual

**Insulation Class:** I

**Ingress Protection (IP):** 20/54

**Mechanical Impact Protection (IK):** 04

**Ambient Temperature Range (°C):** ]-5, 25[

**Fixing System:** Brackets

**Ceiling Thickness (mm):** 1-25

**Warranty (Years):** 5

**Current Supply Cable Entry Point:** Back

## TECHNICAL DATA

**Light Source:** LED

**Input Power (W):** 16

**Input Driver Voltage:** 220-240V-50/60Hz

**Power Factor (λ):** 0,93

**Luminaire Luminous Flux (lm):** 2284

**Luminaire Efficacy (lm/W):** 143

**Unified Glare Rating (UGR):** <22

**LED Lifetime - Rated Median Useful Life:** 80.000h @ L90, B10, Ta 25°C

**CCT - Correlated Colour Temperature (K):** 3000

**Colour Rendering Index (CRI):** >80

**Chromaticity Tolerance (MacAdam step):** <3

**This Product Contains a Light Source of Energy Efficiency Class:** C

**LED Module Forward Voltage Range (VF):** 26,5

**Power Supply Dimming:** DALI 2

**Central Battery Emergency Lighting System (VDC):** 176-280

**Maximum of Luminaires by Magnetic Circuit Breaker B16:** <38

**Inrush Current (A):** <38

**Pulse Duration (µs):** <38

## MATERIALS

**Body Material:** Steel sheet

**Frame Material:** Extruded aluminium profile

**Finishing:** Epoxy polyester powder coated

**Colour:** Carbon (I)

**Glow-wire Resistance (°C):** 650

## DIMENSIONS

**H - Height (mm):** 92

**D - Diameter (mm):** 423

**D - Recess Dimensions (mm):** 405

**H - Recess Height (mm):** 95

## NOTES

- This product cannot be wall applied.