





## ZLP /E L1225W300 DOZ DALI 840 W

VANDAL RESISTANT LUMINAIRES

906J2222JE40000

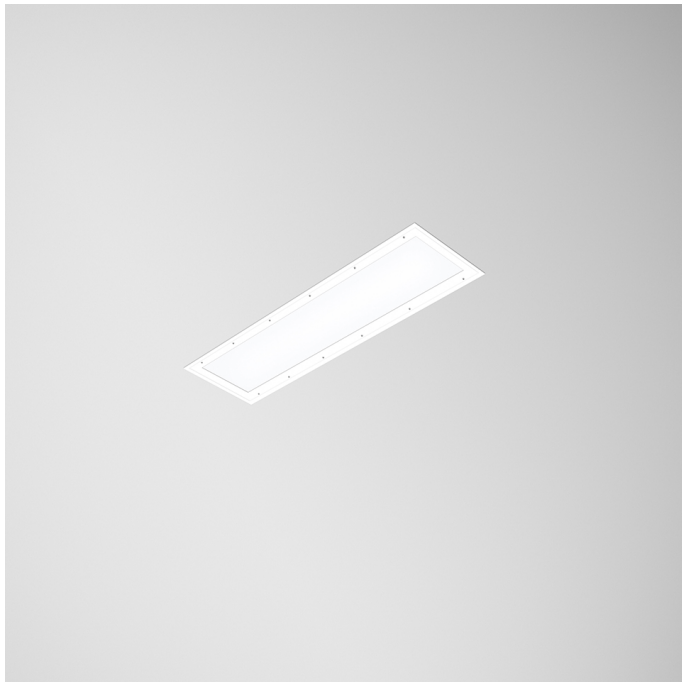

### Light distribution

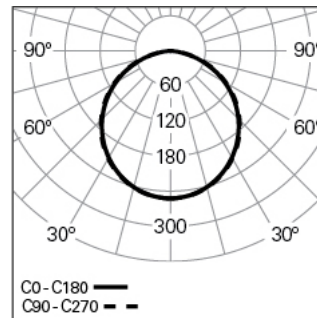

L=1225mm

### PRODUCT DESCRIPTION

**Application Areas:** Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

**Mounting Type:** Recessed

**Control Gear Included:** Yes

**Control Gear:** LED driver 220-240VAC-50/60Hz

## ZLP /E L1225W300 DOZ DALI 840 W

### CHARACTERISTICS

**Luminaire Type:** Rectangular luminaire

**Luminaire Module:** Individual

**Insulation Class:** I

**Ingress Protection (IP):** 65

**Mechanical Impact Protection (IK):** 10

**Ambient Temperature Range (°C):** ]-5, 25[

**Fixing System:** Brackets

**Warranty (Years):** 5

**Current Supply Cable Entry Point:** Back

### MATERIALS

**Body Material:** Steel sheet

**Frame Material:** Steel sheet

**Finishing:** Epoxy polyester powder coated

**Colour:** White (W)

**Glow-wire Resistance (°C):** 850

### OPTICAL SYSTEM

**Optical System:** DOZ - Opal diffuser

**Light Distribution:** Direct

**Beam Angle (°):** 110

### TECHNICAL DATA

**Light Source:** LED

**Input Power (W):** 37

**Input Driver Voltage:** 220-240V-50/60Hz

**Power Factor (λ):** 0,95

**Luminaire Luminous Flux (lm):** 4561

**Luminaire Efficacy (lm/W):** 123

**Unified Glare Rating (UGR):** <25

**LED Lifetime - Rated Median Useful Life:** 72.000h @ L80, B10, Ta 25°C

**CCT - Correlated Colour Temperature (K):** 4000

**Colour Rendering Index (CRI):** >80

**Chromaticity Tolerance (MacAdam step):** <3

**This Product Contains a Light Source of Energy Efficiency Class:** B

**LED Module Forward Voltage Range (VF):** 11,5

**Power Supply Dimming:** DALI 2

**Maximum of Luminaires by Magnetic Circuit Breaker B16:** <21

**Inrush Current (A):** 29

**Pulse Duration (µs):** 155

### DIMENSIONS

**L - Length (mm):** 1225

**W - Width (mm):** 300

**H - Height (mm):** 115

**D - Recess Dimensions (mm):** 1197x272

**H - Recess Height (mm):** 115

**Net Weight (kg):** 14