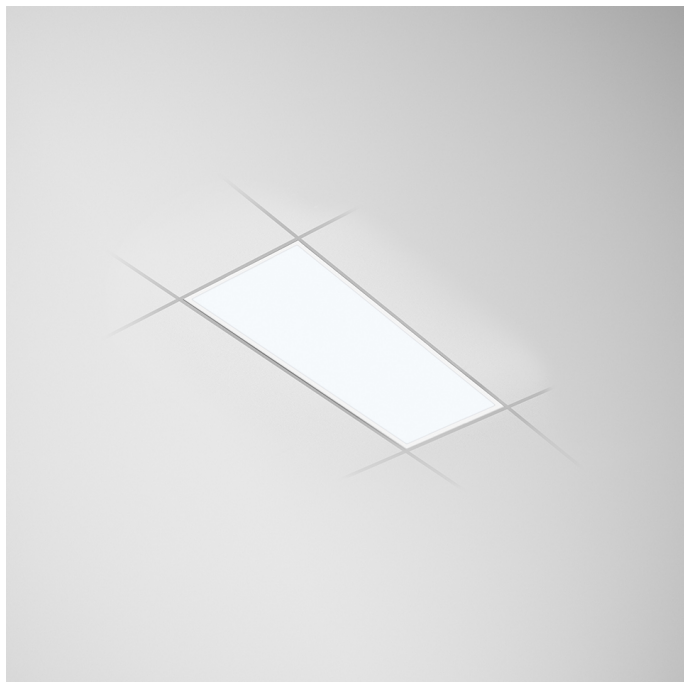




BLED IP L12W30 LIGHT+ DALI K3 830 W LO

TECHNICAL LIGHTING

90846L120HW3300**Light distribution**

L=1195mm

PRODUCT DESCRIPTION

Application Areas: Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

Mounting Type: Recessed

Control Gear Included: Yes

Control Gear: LED driver 220-240VAC-50/60Hz

TECHNICAL DATA

Light Source: LED

Emergency Unit: 3

LED Lifetime - Rated Median Useful Life: 80.000h @ L90, B10, Ta 25°C

DIMENSIONS

L - Length (mm): 1195

W - Width (mm): 295

H - Height (mm): 100

BLED IP L12W30 LIGHT+ DALI K3 830 W LO**CHARACTERISTICS**

Luminaire Type: Rectangular luminaire

Luminaire Module: Individual

Insulation Class: I

Ingress Protection (IP): 20/65

Mechanical Impact Protection (IK): 06

Ambient Temperature Range (°C):]5, 25[

Warranty (Years): 5

Current Supply Cable Entry Point: Back

MATERIALS

Body Material: Steel sheet

Frame Material: Steel sheet

Finishing: Epoxy polyester powder coated

Colour: White (W)

Glow-wire Resistance (°C): 650

OPTICAL SYSTEM

Optical System: LIGHT+ - Opal diffuser

Light Distribution: Direct

Beam Angle (°): 108