

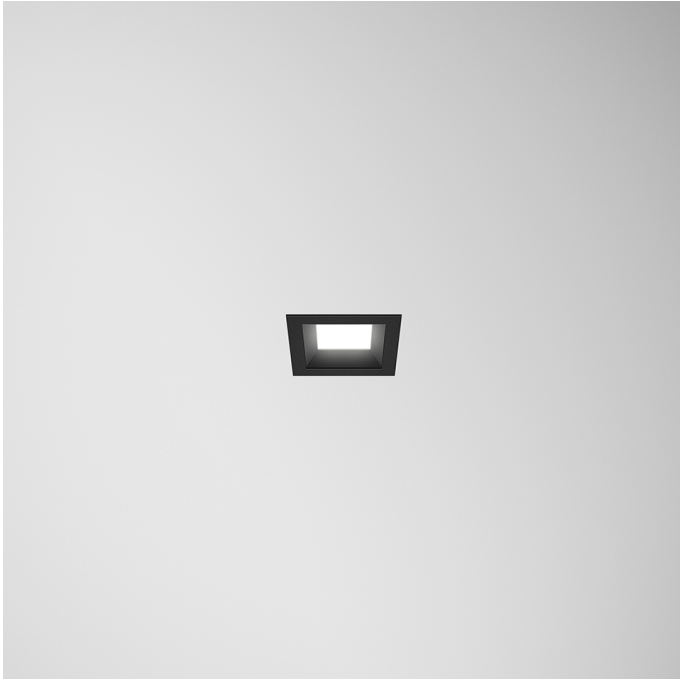


HOLI SQ Q135 PRISM+ 840 B/B HO
ARCHITECTURAL LIGHTING

90259L1100B00B0



Light distribution



L=135mm

PRODUCT DESCRIPTION

Application Areas: Offices, Hotels and residential, Public spaces, Retail, Education, Health and care
Mounting Type: Recessed
Control Gear Included: No

HOLI SQ Q135 PRISM+ 840 B/B HO

CHARACTERISTICS

Luminaire Type: Square downlight
Luminaire Module: Individual
Insulation Class: III
Ingress Protection (IP): 40
Ambient Temperature Range (°C):]-5, 25[
Warranty (Years): 5

MATERIALS

Body Material: Steel sheet
Frame Material: Steel sheet
Finishing: Epoxy polyester powder coated
Colour: Black (B)
Glow-wire Resistance (°C): 650

OPTICAL SYSTEM

Optical System: PRISM+ - Microprismatic diffuser
Light Distribution: Direct
Beam Angle (°): 76

TECHNICAL DATA

Light Source: LED
Input Power (W): 8

Power Factor (λ): 1

Luminaire Luminous Flux (lm): 927
Luminaire Efficacy (lm/W): 116
Unified Glare Rating (UGR): <19
LED Lifetime - Rated Median Useful Life: 72.000h @ L70, B10, Ta 25°C
CCT - Correlated Colour Temperature (K): 4000
Colour Rendering Index (CRI): >80
Chromaticity Tolerance (MacAdam step): <3
This Product Contains a Light Source of Energy Efficiency Class: D
LED Module Forward Voltage Range (VF): 33,4
Input luminaire current (mA): 250

DIMENSIONS

L - Length (mm): 135
W - Width (mm): 135
H - Height (mm): 73
D - Recess Dimensions (mm): 115x115
H - Recess Height (mm): 83
Net Weight (kg): 0.8

NOTES

- To complete the product it is necessary to order the driver separately.