

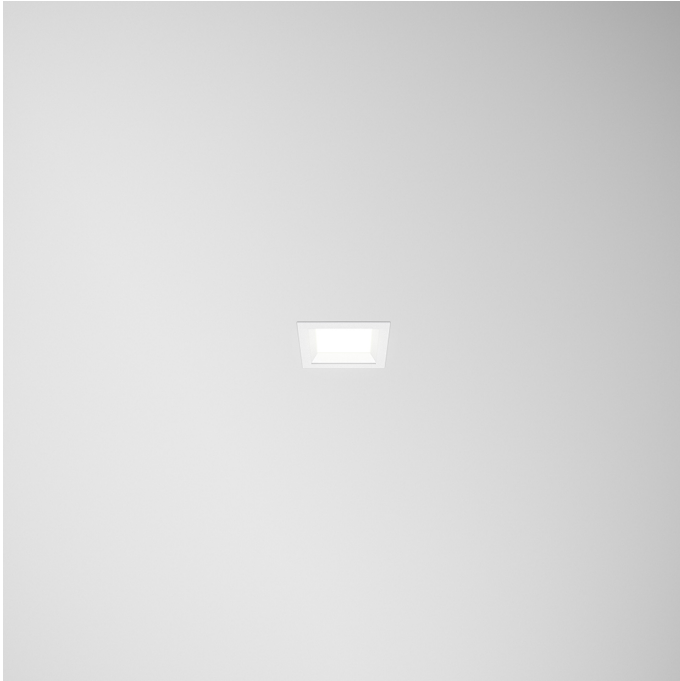


**HOLI SQ MINI Q100 LIGHT+ 830 W/W**  
ARCHITECTURAL LIGHTING

**90293L1070W03W0**



**Light distribution**



L=100mm

**PRODUCT DESCRIPTION**

**Application Areas:** Offices, Hotels and residential, Public spaces, Retail, Education, Health and care  
**Mounting Type:** Recessed  
**Control Gear Included:** No

**HOLI SQ MINI Q100 LIGHT+ 830 W/W**

**CHARACTERISTICS**

**Luminaire Type:** Square downlight  
**Luminaire Module:** Individual  
**Insulation Class:** III  
**Ingress Protection (IP):** 40  
**Ambient Temperature Range (°C):** ]-5, 25[  
**Warranty (Years):** 5

**MATERIALS**

**Body Material:** Steel sheet  
**Frame Material:** Steel sheet  
**Finishing:** Epoxy polyester powder coated  
**Colour:** White (W)  
**Glow-wire Resistance (°C):** 650

**OPTICAL SYSTEM**

**Optical System:** LIGHT+ - Opal diffuser  
**Light Distribution:** Direct  
**Beam Angle (°):** 96

**TECHNICAL DATA**

**Light Source:** LED  
**Input Power (W):** 7

**Power Factor (λ):** 1

**Luminaire Luminous Flux (lm):** 807

**Luminaire Efficacy (lm/W):** 115

**United Glare Rating (UGR):** <25

**LED Lifetime - Rated Median Useful Life:** 72.000h @ L70, B10, Ta 25°C

**CCT - Correlated Colour Temperature (K):** 3000

**Colour Rendering Index (CRI):** >80

**Chromaticity Tolerance (MacAdam step):** <3

**This Product Contains a Light Source of Energy Efficiency Class:** E

**LED Module Forward Voltage Range (VF):** 33

**Input luminaire current (mA):** 200

**DIMENSIONS**

**L - Length (mm):** 100

**W - Width (mm):** 100

**H - Height (mm):** 69

**D - Recess Dimensions (mm):** 97x97

**H - Recess Height (mm):** 79

**Net Weight (kg):** 0.7

**NOTES**

- To complete the product it is necessary to order the driver separately.