

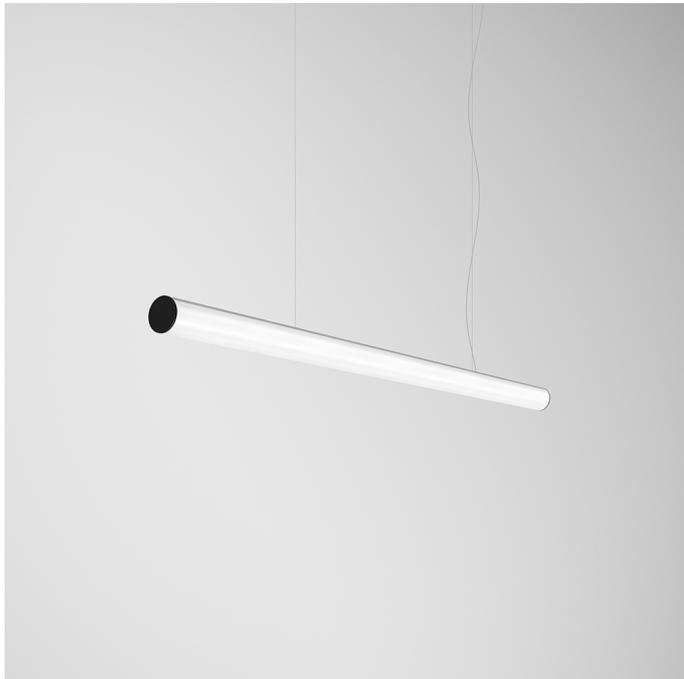


TALEA GLARE L2278 BLINE K3 830 B
TUBULAR LUMINAIRES

90428L1800B3300



Light distribution

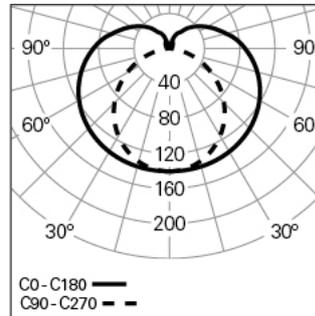

L=2278mm

PRODUCT DESCRIPTION

Application Areas: Offices, Hotels and residential, Public spaces, Retail, Education, Health and care
Mounting Type: Surface mounted, Suspended, Wall mounted
Control Gear Included: No

TALEA GLARE L2278 BLINE K3 830 B

CHARACTERISTICS

Luminaire Type: Straight line luminaire
Insulation Class: III
Ingress Protection (IP): 40
Ambient Temperature Range (°C):]-5, 25[
Warranty (Years): 5
Current Supply Cable Entry Point: Back

MATERIALS

Body Material: Extruded aluminium profile
Finishing: Epoxy polyester powder coated
Colour: Black (B)
Glow-wire Resistance (°C): 960

OPTICAL SYSTEM

Optical System: bLINE - Opal diffuser
Light Distribution: Direct
Beam Angle (°): 183

TECHNICAL DATA

Light Source: LED
Input Power (W): 32
Power Factor (λ): 1

Luminaire Luminous Flux (lm): 4435
Luminaire Efficacy (lm/W): 139
Emergency Unit: 3
Unified Glare Rating (UGR): <3
LED Lifetime - Rated Median Useful Life: 80.000h @ L90, B10, Ta 25°C
CCT - Correlated Colour Temperature (K): 3000
Colour Rendering Index (CRI): >80
Chromaticity Tolerance (MacAdam step): <3
LED Module Forward Voltage Range (VF): 33,1
Input luminaire current (mA): 960

DIMENSIONS

L - Length (mm): 2278
D - Diameter (mm): 100
Net Weight (kg): 6.7

NOTES

• To complete the product it is necessary to order the suspension, the current supply cable and ceiling rose. Please order separately.