

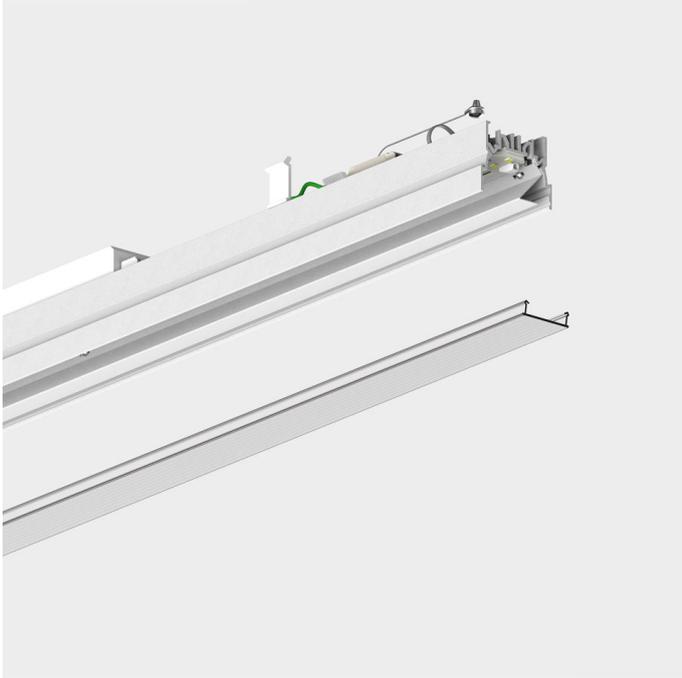


REBA 50 D/I INT L1122 ASYM DALI 830 HO
ALUMINIUM PROFILE SYSTEMS

90530L004HW0300



Light distribution



L=1120mm

PRODUCT DESCRIPTION

Application Areas: Offices, Hotels and residential, Public spaces, Retail, Education, Health and care
Mounting Type: Suspended
Control Gear Included: No

REBA 50 D/I INT L1122 ASYM DALI 830 HO

CHARACTERISTICS

Luminaire Type: Straight line luminaire
Luminaire Module: Individual, Middle (MID), Start / End (SRT/END)
Insulation Class: I
Ingress Protection (IP): 40
Ambient Temperature Range (°C):]-5, 25[
Warranty (Years): 5
Current Supply Cable Entry Point: Back

MATERIALS

Body Material: Extruded aluminium profile
Finishing: Epoxy polyester powder coated
Colour: White (W)
Glow-wire Resistance (°C): 850

OPTICAL SYSTEM

Optical System: ASYM - Asymmetric diffuser
Light Distribution: Direct / Indirect
Beam Angle (°): 54

TECHNICAL DATA

Light Source: LED
Input Power (W): 56

Input Driver Voltage: 220-240V-50/60Hz
Power Factor (λ): 0,94
Luminaire Luminous Flux (lm): 4504
Luminaire Efficacy (lm/W): 80
Unified Glare Rating (UGR): <19
LED Lifetime - Rated Median Useful Life: 80.000h @ L90, B10, Ta 25°C
CCT - Correlated Colour Temperature (K): 3000
Photobiological safety according to IEC 62471: Not Available
Colour Rendering Index (CRI): >80
Chromaticity Tolerance (MacAdam step): <3
LED Module Forward Voltage Range (VF): 33,1
Power Supply Dimming: DALI 2
Central Battery Emergency Lighting System (VDC): 176-280
Maximum of Luminaires by Magnetic Circuit Breaker B16: <34
Inrush Current (A): 18
Pulse Duration (µs): 180
This Product contains a Light Source of Energy Efficiency Class [Indirect]: C

DIMENSIONS

L - Length (mm): 1120
W - Width (mm): 47
H - Height (mm): 64
Net Weight (kg): 1.98

NOTES

- The indirect light diffuser is included on the product;
- To complete the product it is necessary to order the inner profile, suspension kit, current supply cable and ceiling rose. Please order separately.