

Luminaire

Code 90269L006

Name HOLI SQ /C MINI Q115 LIGHT+ 830

Measurement

Code 2/3/2023



Name HOLI SQ /C MINI Q115 LIGHT+ 830

Luminaire Flux	859 lm	Luminaire Power	7.7 W	Efficacy	111.737 lm/W	Efficiency	98.99%
Source Flux	868 lm	Maximum value	447.60 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

115mm x 115mm

C Halfplanes

180.0 ————— 0.0
270.0 ————— 90.0

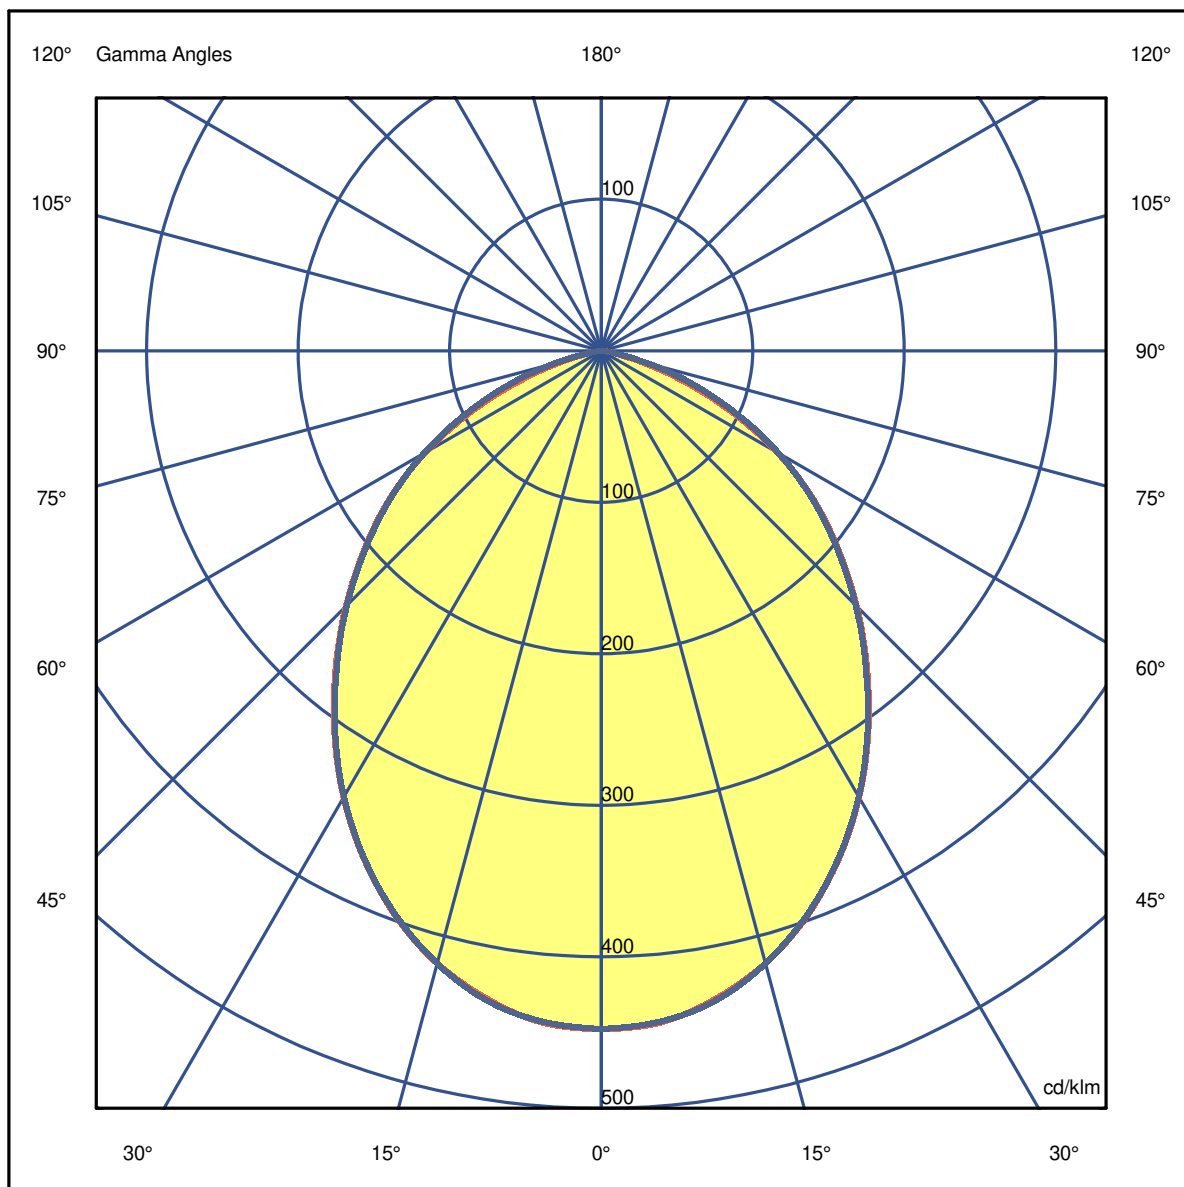

Luminaire

Code 90269L006

Name HOLI SQ /C MINI Q115 LIGHT+ 830

Measurem.

Code 2/3/2023


Name HOLI SQ /C MINI Q115 LIGHT+ 830

Luminaire Flux	859 lm	Luminaire Power	7.7 W	Efficacy	111.737 lm/W	Efficiency	98.99%
Source Flux	868 lm	Maximum value	447.60 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.08	2.15	3.23	4.31	5.39	OC	1.07	2.14	3.22	4.29	5.36
OB	1.08	2.15	3.23	4.31	5.39	OD	1.07	2.14	3.22	4.29	5.36

	0	5	15	25	35	45	55	65	75	85
OA	388.52	386.35	363.34	321.42	266.65	206.93	148.08	82.11	22.05	2.69
OB	388.52	386.35	363.34	321.42	266.65	206.93	148.08	82.11	22.05	2.69
OC	388.52	385.74	363.26	321.16	265.96	206.15	147.47	85.85	27.78	2.34
OD	388.52	385.74	363.26	321.16	265.96	206.15	147.47	85.85	27.78	2.34

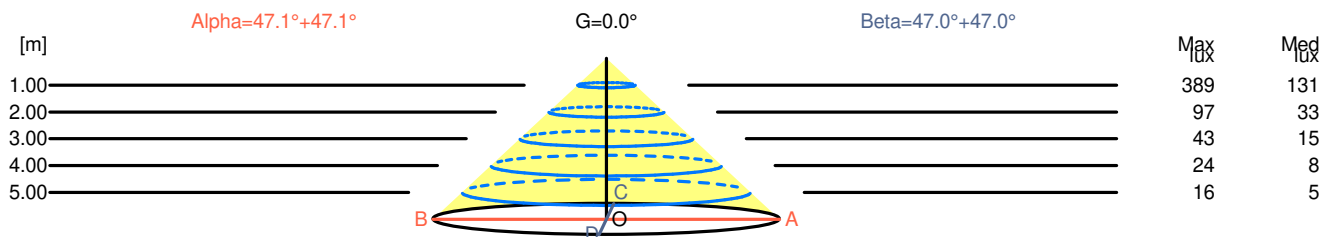

H[m]	D[m]	Max lux	Med lux	Alpha=47.1°+47.1°	G=0.0	
1.00	2.15	389	131			
2.00	4.31	97	33			
3.00	6.46	43	15			
4.00	8.62	24	8			
5.00	10.77	16	5			

H[m]	D[m]	Max lux	Med lux	Beta=47.0°+47.0°	G=0.0	
1.00	2.14	389	131			
2.00	4.29	97	33			
3.00	6.43	43	15			
4.00	8.57	24	8			
5.00	10.72	16	5			

Luminaire

Code 90269L006

Name HOLI SQ /C MINI Q115 LIGHT+ 830


Measurem.

Code 2/3/2023

Name HOLI SQ /C MINI Q115 LIGHT+ 830

Luminaire Flux	859 lm	Luminaire Power	7.7 W	Efficacy	111.737 lm/W	Efficiency	98.99%
Source Flux	868 lm	Maximum value	447.60 cd/klm	Position	C=0.00 G=0.00	CG Double Symmetrical	

Luminance

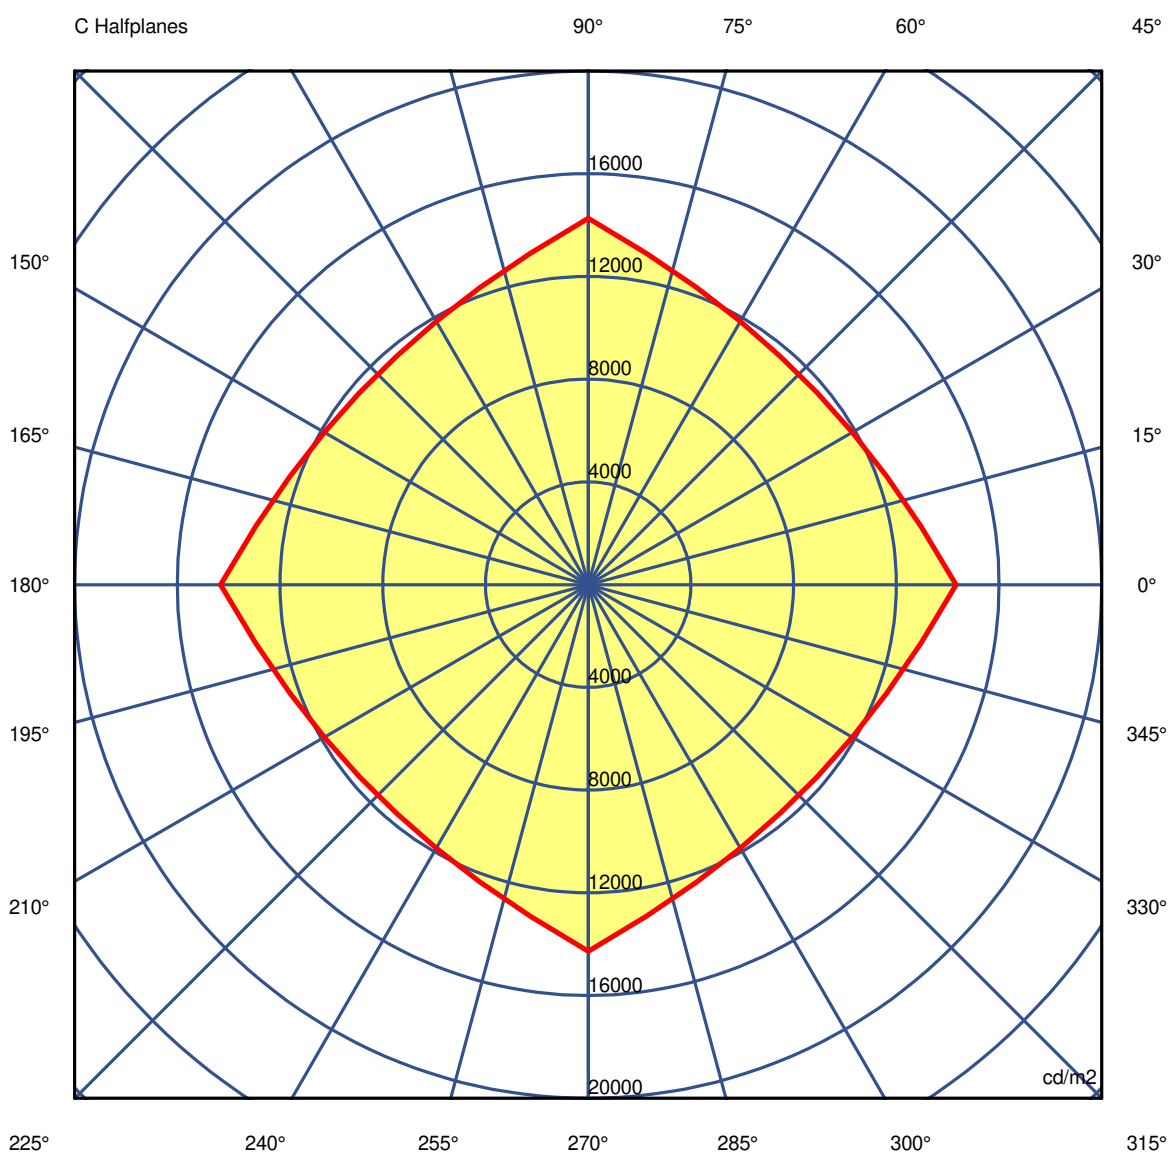

45.0°

