


ROFY

Range



INDELAGUE GROUP

INDELAGUE ROXO lighting

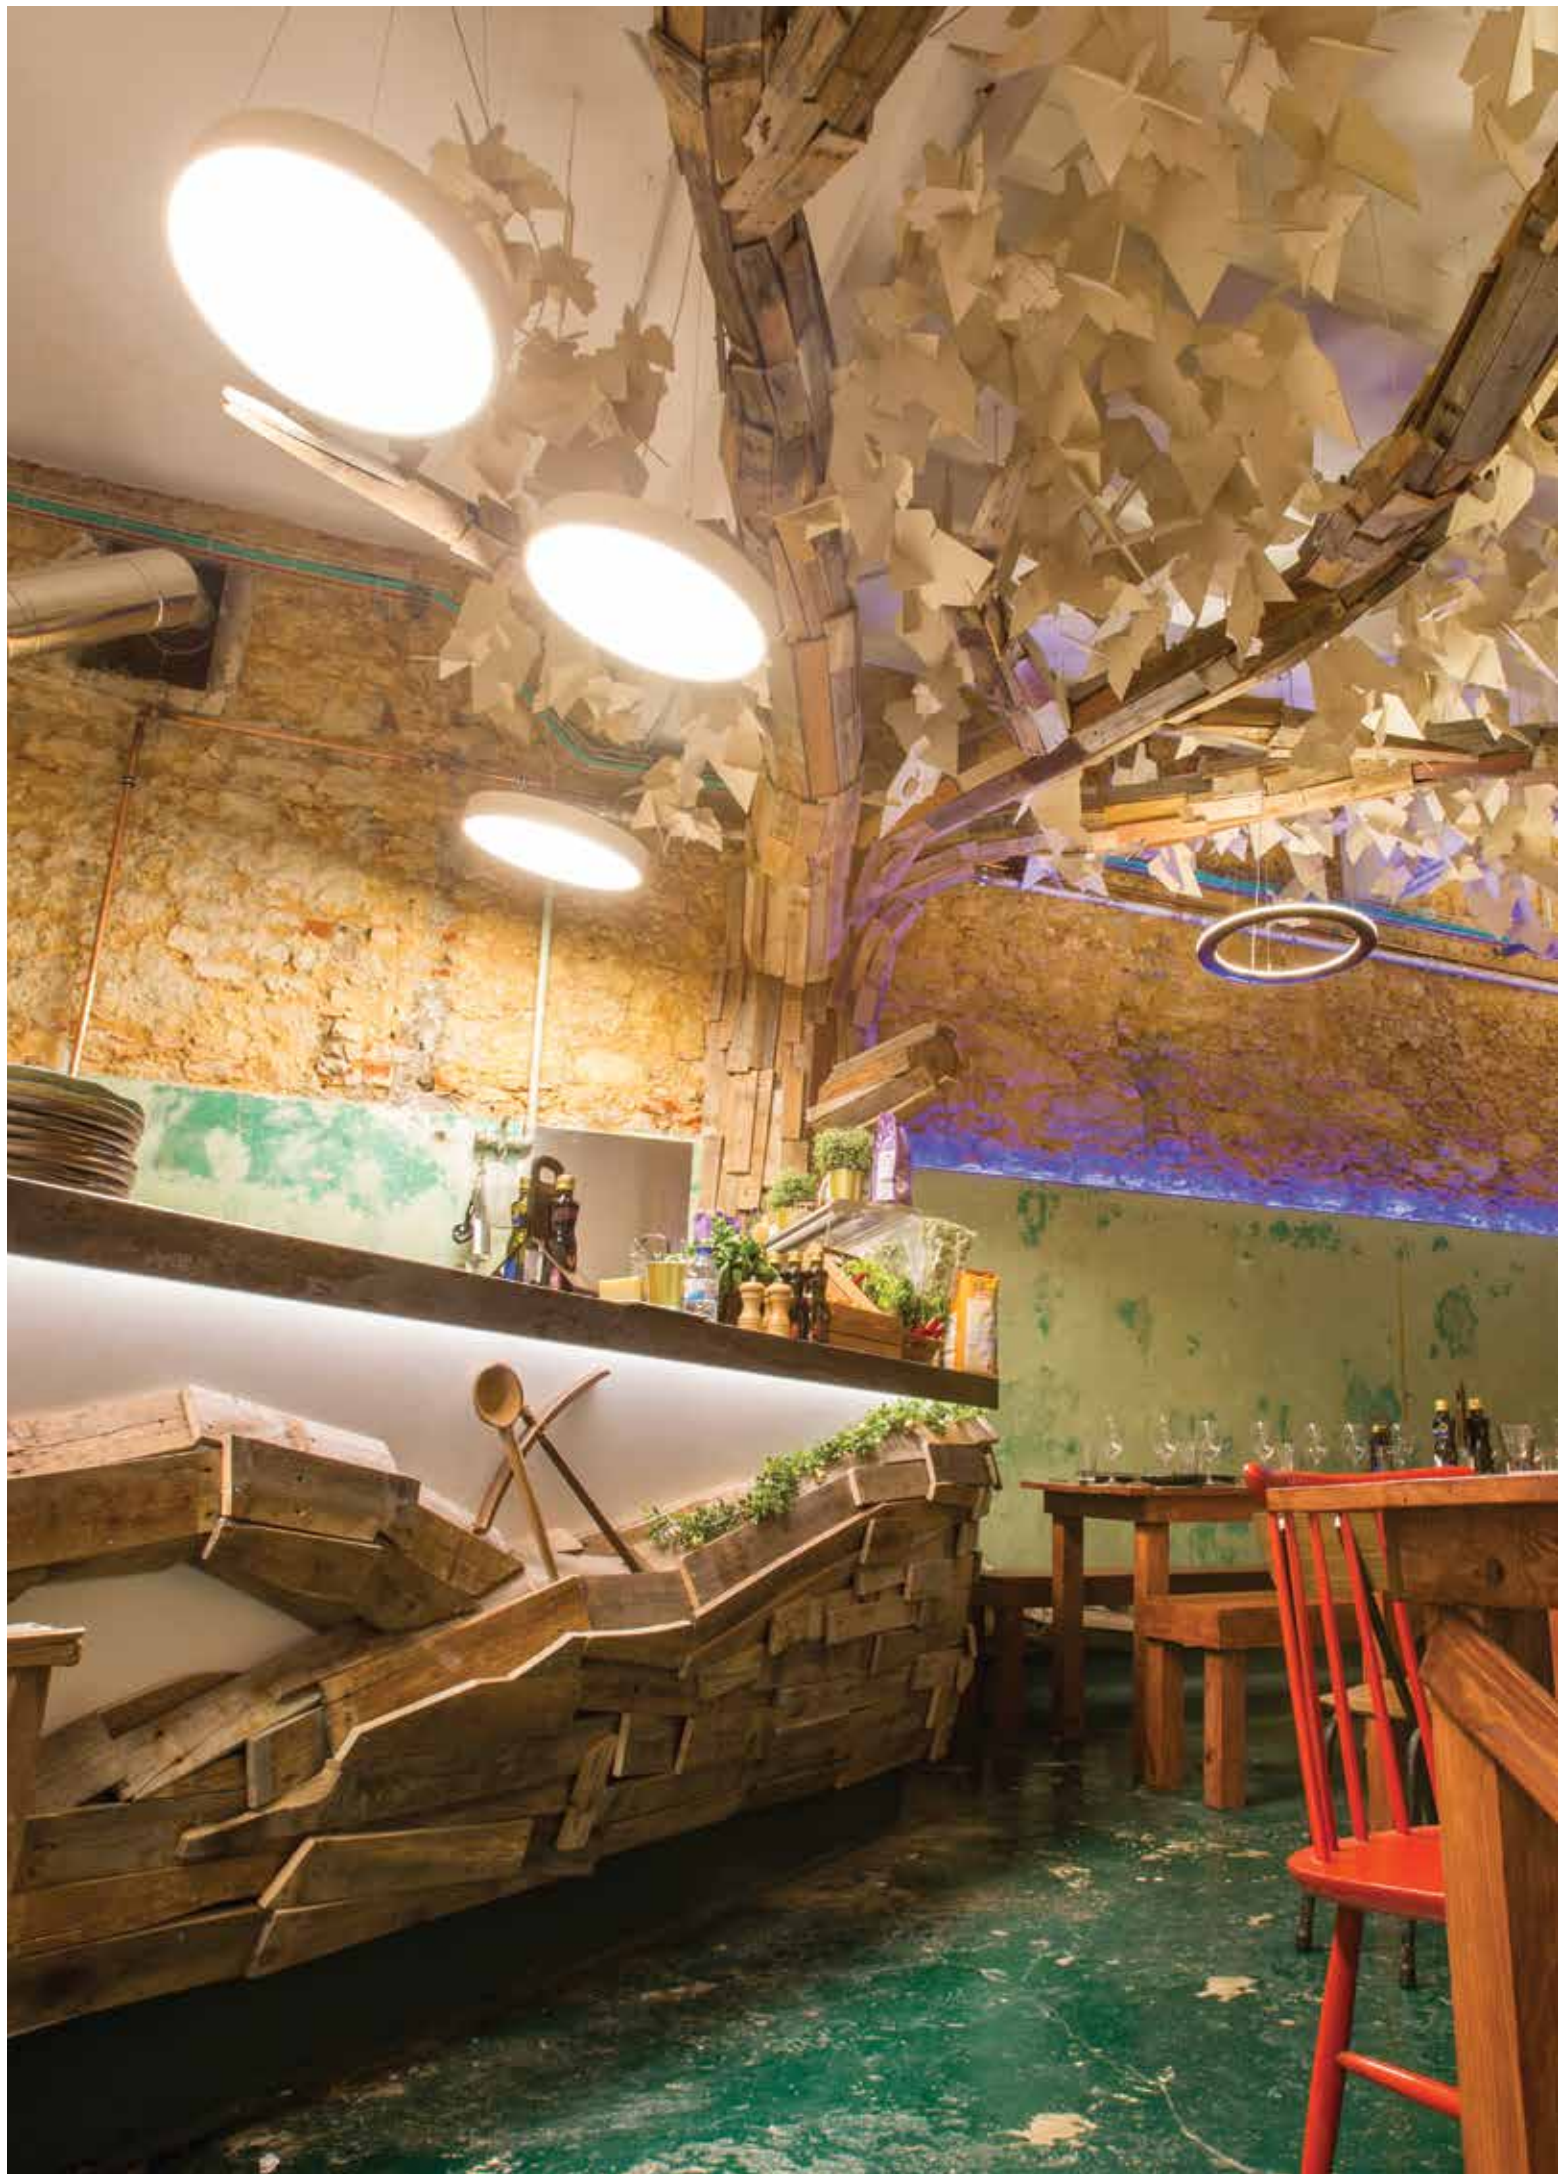

Architectural
lighting

ROFY



ROFY 60 / T



ROFY 60 / T D/I



ROFY 60



ROFY 60 Sq



ROFY 60 D/I



ROFY 60 Sq D/I



ROFY 85 / E



ROFY 85



ROFY 85 D/I



ROFY 85 IP / E



ROFY 85 IP / C



Application types





**1. Recessed
with trim/frame**

**2. Trimless
Direct**

**3. Trimless
Direct / Indirect**

**4. Wall mounted
Direct**

**5. Wall mounted
Direct / Indirect**

**6. Surface mounted
Direct**

**7. Surface mounted
Direct / Indirect**


**8. Suspended
Direct**

**9. Suspended
Direct / Indirect**





**Two available
versions**

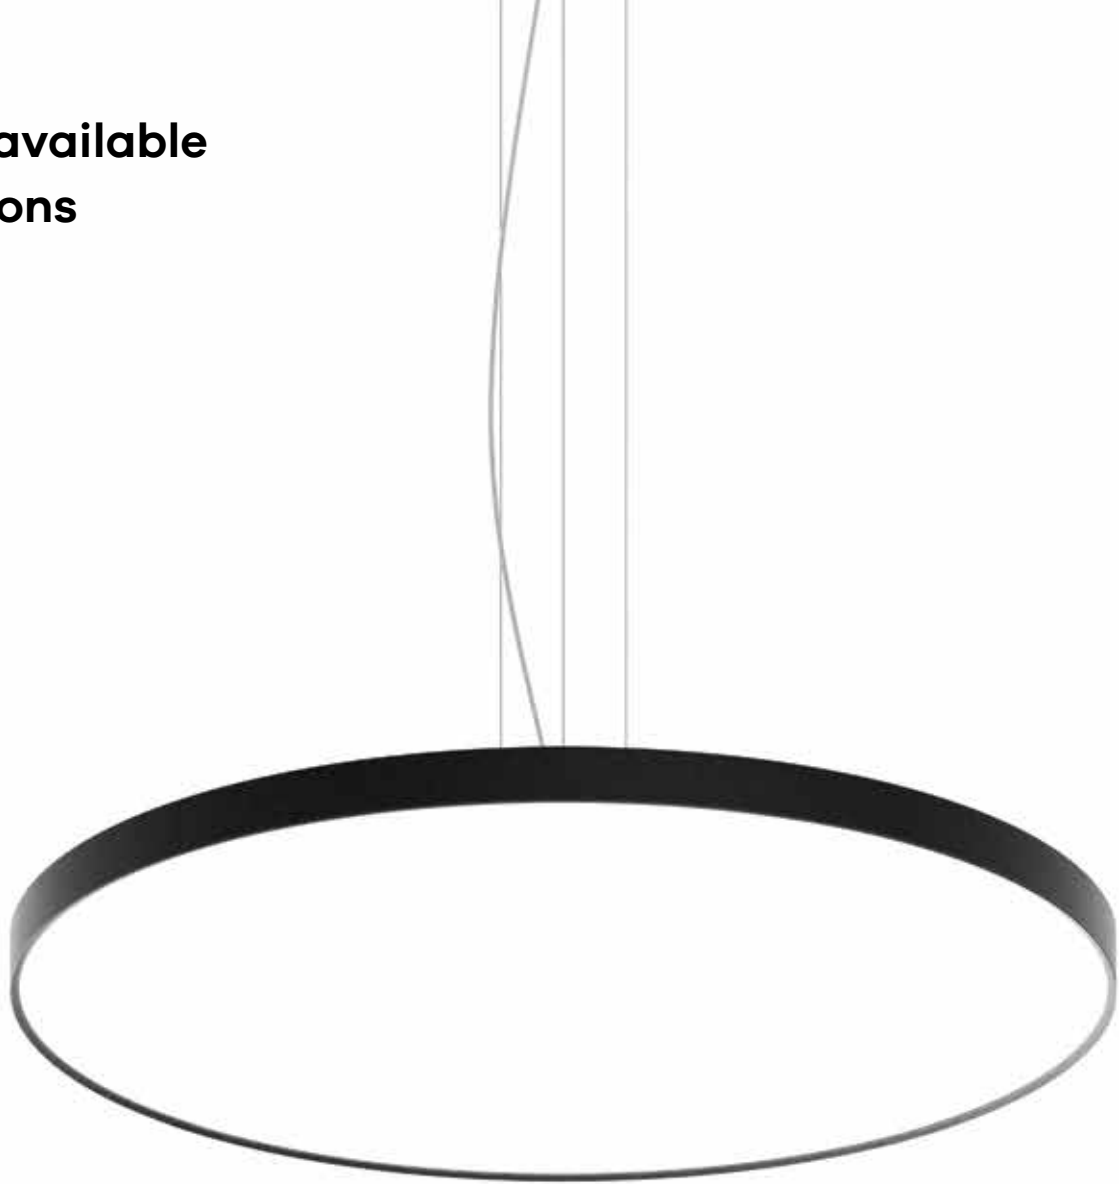


ROFY 60





ROFY 85




85 mm




Optical system

1. gCONTROL+



2. LIGHT+



Minimalism and technology

1. Body

Seamlessly welded aluminium profile, available in 12 colours.

2. LED

SDCM MacAdam ≤ 3 , 3000K / 4000K colour temperature, CRI > 80 and 80.000h lifetime L90 B10.

3. Tunable White

Tunable White versions available with a white light spectrum from 2700K to 6500K. Available from $\varnothing 400$ mm.



4. gCONTROL+ or LIGHT+

High-tech optical system with LIGHT+ opal version to ensure smooth and uniform light, or gCONTROL+ microprismatic version for high visual comfort (UGR < 19) and without visible spots).



5. HPR

Internal high-performance reflector to ensure high efficiency and smooth and uniform light.

6. Indirect light


Direct / indirect version with 80% / 20% light ratio and opal diffuser for light uniformity on the ceiling.



7. HF or dimmable DALI driver

8. Suspension and current supply cable

Thanks to a wide range of suspensions and ceiling roses, you can select a very minimalist and discrete suspension. The central suspension allows the luminaire to subtly integrate into any project. Suspensions and power cable available in 1500, 3000 or 6000 mm length.

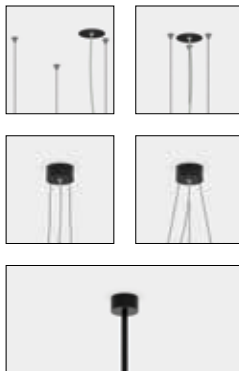

9. Ceiling rose

Recessed, surface mounted or central ceiling roses, available in white or black colour.




10. Emergency unit

3h emergency unit. Available from ≈ 600 to ≈ 1150 mm.

11. IP version












Available with water and dust protection index IP54.



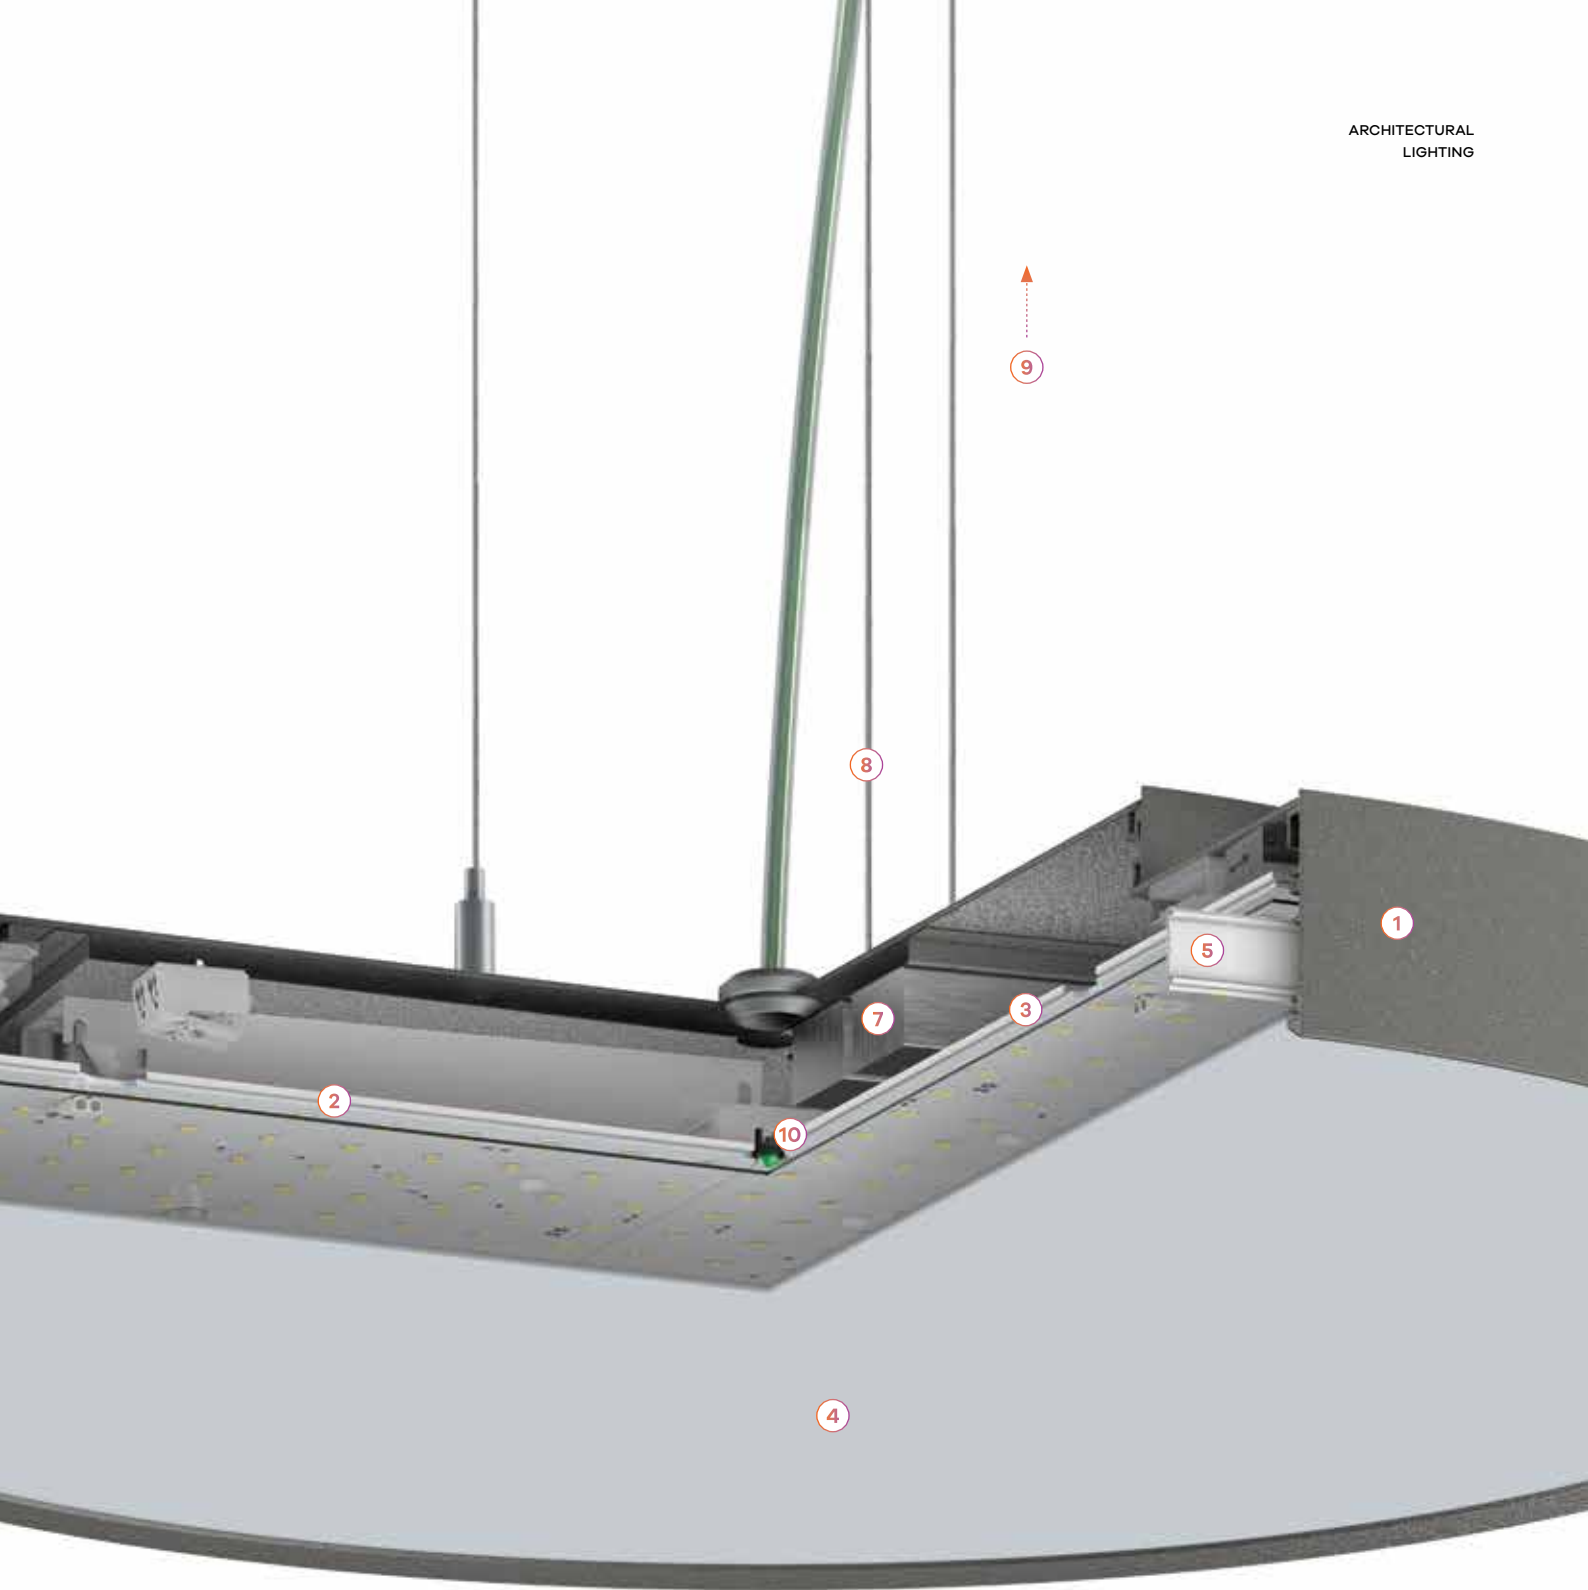

Define your colour

ARCHITECTURAL
LIGHTING













INDELAGUE GROUP

HEADQUARTERS

INDÚSTRIA ELÉTRICA
DE ÁGUEDA S.A.
Rua da Mina 465 | Covão
Zona industrial EN1 Norte
3750-792 Trofa
ÁGUEDA | PORTUGAL
T. +351 234 612 310
indelague@indelague.pt

SPAIN

INDELAGUE ESPAÑA, S.L.
Avenida del Ejército, nº 8 - 1º C
C.P. 15006 | A CORUÑA | ESPAÑA
comercial@indelague.com

All data contained in this catalogue does not constitute any compromise to INDELAGUE - Indústria Eléctrica de Águeda, S.A.. The company itself, reserves the right to change or modify any information stated without prior notice. The reproduction of this catalogue or any part of it is prohibited. Electrical/ Optical data=±10%.