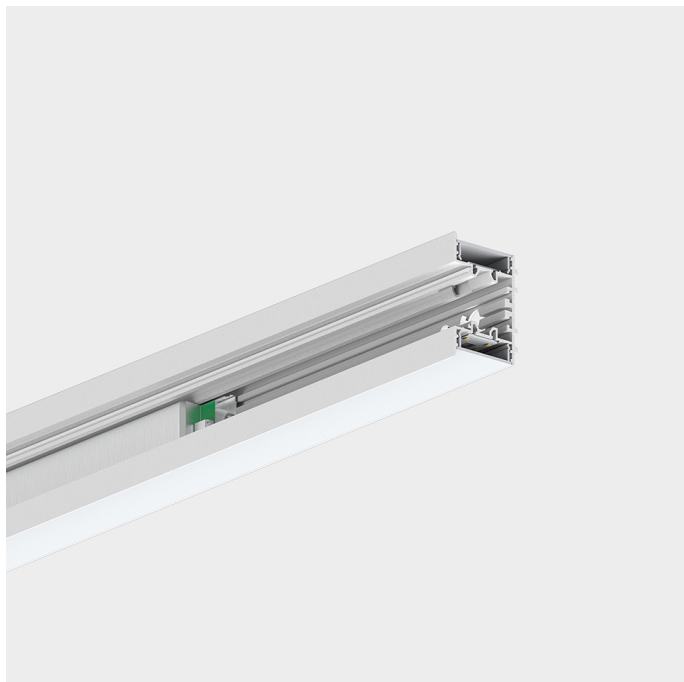

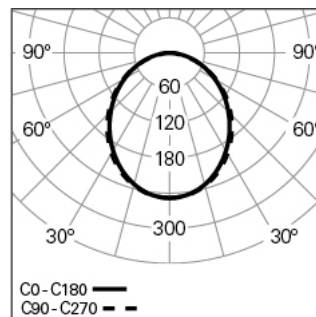


**REBA 50 /W INT DIR L2522 BLINE HF K3 840 HO**

ALUMINIUM PROFILE SYSTEMS

**90535L009EW3000****Light distribution**

L=2522mm

**PRODUCT DESCRIPTION**

**Application Areas:** Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

**Mounting Type:** Wall mounted

**Control Gear Included:** No

**REBA 50 /W INT DIR L2522 BLINE HF K3 840 HO****CHARACTERISTICS**

**Luminaire Type:** Straight line luminaire

**Luminaire Module:** Individual, Middle (MID), Start / End (SRT/END)

**Insulation Class:** I

**Ingress Protection (IP):** 40

**Ambient Temperature Range (°C):** ]-5, 25[

**Warranty (Years):** 5

**Current Supply Cable Entry Point:** Back

**Input Driver Voltage:** 220-240V-50/60Hz

**Power Factor (λ):** 0,94

**Luminaire Luminous Flux (lm):** 7558

**Luminaire Efficacy (lm/W):** 116

**Emergency Unit:** 3

**Unified Glare Rating (UGR):** <28

**LED Lifetime - Rated Median Useful Life:** 80.000h @ L90, B10, Ta 25°C

**CCT - Correlated Colour Temperature (K):** 4000

**Photobiological safety according to IEC 62471:** Not Available

**Colour Rendering Index (CRI):** >80

**Chromaticity Tolerance (MacAdam step):** <3

**This Product Contains a Light Source of Energy Efficiency Class:** C

**LED Module Forward Voltage Range (VF):** 32,2

**Power Supply Dimming:** ON/OFF

**Maximum of Luminaires by Magnetic Circuit Breaker B16:** <12

**Inrush Current (A):** 24

**Pulse Duration (µs):** 194

**MATERIALS**

**Body Material:** Extruded aluminium profile

**Finishing:** Epoxy polyester powder coated

**Colour:** White (W)

**Glow-wire Resistance (°C):** 960

**DIMENSIONS**

**L - Length (mm):** 2522

**W - Width (mm):** 54

**H - Height (mm):** 85

**Net Weight (kg):** 5.68

**OPTICAL SYSTEM**

**Optical System:** bLINE - Opal diffuser

**Light Distribution:** Direct

**Beam Angle (°):** 104

**TECHNICAL DATA**

**Light Source:** LED

**Input Power (W):** 65

**NOTES**

- To complete the product it is necessary to order the inner profile separately.