

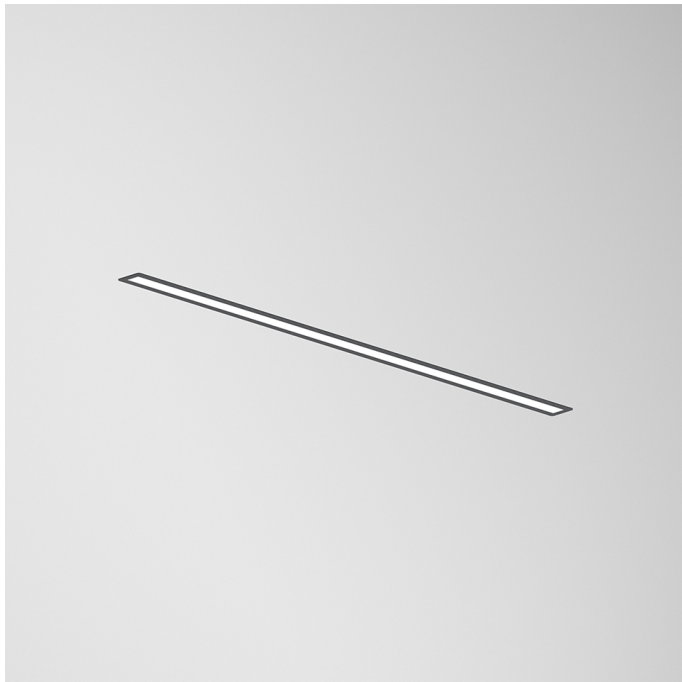


CONCEPT LINEA 35 /E L1967 DALI 840 I SRT
ARCHITECTURAL LIGHTING

90709L014HI0049



Light distribution

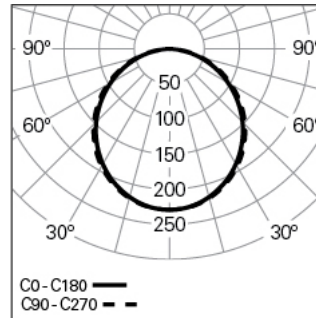

L=1967mm

PRODUCT DESCRIPTION

Application Areas: Architectural, Offices, Hotels and residential, Public spaces, Retail, Art and Culture, Education, Health and care

Mounting Type: Recessed

Control Gear Included: Yes

Control Gear: LED driver 220-240VAC-50/60Hz

CONCEPT LINEA 35 /E L1967 DALI 840 I SRT

CHARACTERISTICS

Luminaire Type: Straight line luminaire

Luminaire Module: Start (SRT)

Insulation Class: I

Ingress Protection (IP): 40

Ambient Temperature Range (°C):]-5, 25[

Fixing System: Brackets

Ceiling Thickness (mm): 1-25

Warranty (Years): 5

Current Supply Cable Entry Point: Back

MATERIALS

Body Material: Extruded aluminium profile

Finishing: Epoxy polyester powder coated

Colour: Carbon (I)

Glow-wire Resistance (°C): 960

OPTICAL SYSTEM

Optical System: bFLEX - Opal diffuser

Light Distribution: Direct

Beam Angle (°): 111

TECHNICAL DATA

Light Source: LED

Input Power (W): 61

Input Driver Voltage: 220-240V-50/60Hz

Power Factor (λ): 0,98

Luminaire Luminous Flux (lm): 5777

Luminaire Efficacy (lm/W): 95

LED Lifetime - Rated Median Useful Life: 70.000h @ L90, B10, Ta 25°C

CCT - Correlated Colour Temperature (K): 4000

Colour Rendering Index (CRI): >80

Chromaticity Tolerance (MacAdam step): <3

LED Module Forward Voltage Range (VF): 24V DC

Power Supply Dimming: DALI 2

Maximum of Luminaires by Magnetic Circuit Breaker B16: <30

DIMENSIONS

L - Length (mm): 1967

W - Width (mm): 58

H - Height (mm): 99.5

NOTES

- To complete the product it is necessary to order the bFLEX diffuser and the start kit. Please order separately;
- To complete the product it is necessary to order the bFLEX diffuser, start kit and body connector kit. Please order separately;
- Dimensions do not include the start kit. Add 6 mm to the recessing length to complete the line;
- To obtain the cutting dimensions, see the instruction manual attached to the product or on our website;
- The noise level is 20 dB, lower than the typical ambient sound levels recorded in environments such as libraries and reading rooms.